


# DA-682A-UART Series Expansion Modules

Expansion modules with RS-232/422/485 and RS-232/485 serial ports

## Features and Benefits

- 8-port RS-232/422/485 serial module with DB9 connector
- 8-port RS-422/485 isolated serial module with terminal block connector
- 8-port RS-232/422/485 isolated serial module with DB9 or terminal block connector
- 8-port RS-232/422/485 isolated serial module with DB9 or terminal block connector, EMC Level 4

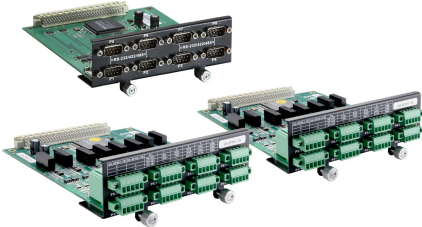


## Introduction


The DA-682A-UART Series expansion modules include an 8-port RS-232/422/485 module with either DB9 or terminal block connectors, and an 8-port RS-422/485 module with terminal block connectors. Some modules are even designed with 2 kV digital isolation, making them fully suitable for the great demands of industrial applications that use serial communication.

## Appearance


DA-SP08-I-TB, DA-SP08-I-EMC4-TB

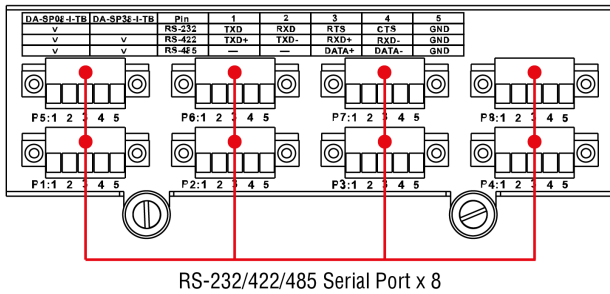

DA-SP08-DB, DA-SP08-I-DB, DA-SP08-I-EMC4-DB

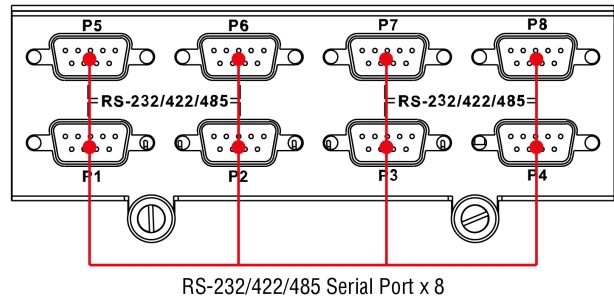

DA-SP38-I-TB

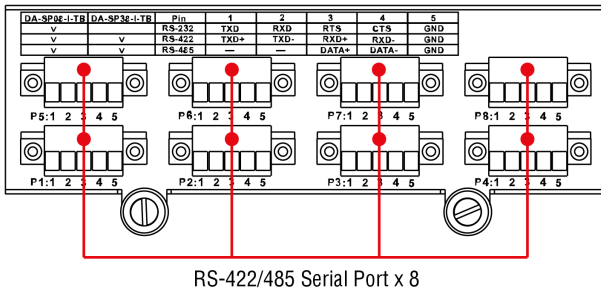

## Specifications

### Computer Interface

Serial Ports	DA-SP08-I-EMC4-TB: 8-port isolated RS-232/422/485, DB9 connector, EMC Level 4 DA-SP08-I-EMC4-DB: 8-port isolated RS-232/422/485, terminal block connector, EMC Level 4 DA-SP08-I-TB: 8-port isolated RS-232/422/485, terminal block connector DA-SP08-I-DB: 8-port isolated RS-232/422/485, DB9 connector DA-SP38-I-TB: 8-port isolated RS-422/485, terminal block connector DA-SP08-DB: 8-port RS-232/422/485, DB9 connector
--------------	--

### Serial Interface

Baudrate	50 bps to 921.6 kbps
Data Bits	5, 6, 7, 8
ESD	15 kV
Flow Control	ADDC® (automatic data direction control) for RS-485, RTS/CTS, XON/XOFF
Isolation	2 kV
Parity	None, Even, Odd, Space, Mark
Stop Bits	1, 1.5, 2
Surge	DA-SP08-I-EMC4-TB/DA-SP08-I-EMC4-DB: 4 kV

### Serial Signals

RS-232	DB9: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND Terminal block: TxD, RxD, RTS, CTS, GND
RS-422	Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w	Data+, Data-, GND
RS-485-4w	Tx+, Tx-, Rx+, Rx-, GND

### Physical Characteristics

Dimensions (without ears)	130 x 150 mm (42 x 5.12 in)
Weight	DA-SP08-DB: 266 g (0.59 lb) DA-SP08-I-DB: 290 g (0.64 lb) DA-SP08-I-TB: 290 g (0.64 lb) DA-SP08-I-EMC4-DB: 323 g (0.71 lb) DA-SP08-I-EMC4-TB: 262 g (0.58 lb) DA-SP38-I-TB: 240 g (0.53 lb)

### Environmental Limits

Operating Temperature	-25 to 60°C (-13 to 140°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

### Declaration

Green Product	RoHS, CRoHS, WEEE
---------------	-------------------

### MTBF

Time	1,753,143 hrs
Standards	Telcordia (Bellcore), GB

## Warranty

Warranty Period	3 years
Details	See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>


## Package Contents

Device	1 x DA-682A-UART Series expansion module
Documentation	1 x warranty card

## Dimensions


### Terminal Block Series

Unit: mm (inch)

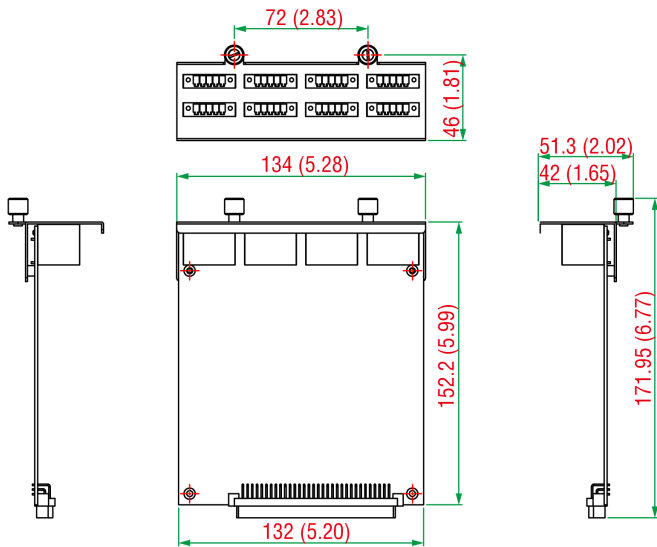

### DB9 Series

Unit: mm (inch)

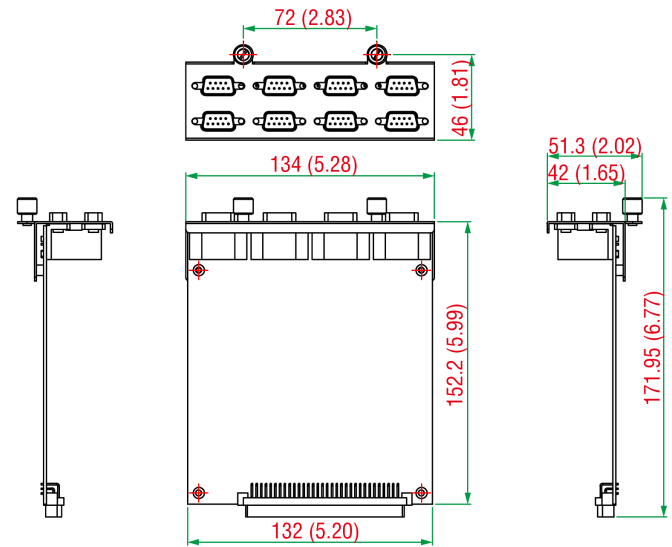

## Ordering Information

Model Name	No. of Ports	RS-232/422/485	RS-422/485	DB9	5-Pin Terminal Block
DA-SP08-DB	8	✓	–	✓	–
DA-SP08-I-TB	8	✓	–	–	✓
DA-SP08-I-DB	8	✓	–	✓	–
DA-SP08-I-EMC4-DB	8	✓	–	✓	–
DA-SP08-I-EMC4-TB	8	✓	–	–	✓
DA-SP38-I-TB	8	–	✓	–	✓

© Moxa Inc. All rights reserved. Updated Nov 12, 2018.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.