

NPort® S8458 Series

Combo switch / serial device server



- > 4-port RS-232/422/485 serial device server
 - Serial QoS for configuring serial data transmission priority
- > 8-port managed Ethernet switch built in
 - 10/100BaseT(X)(RJ45 connector), 100BaseFX (single-mode SC connector)
 - Ethernet redundancy with Turbo Ring and Turbo Chain (recovery time < 20 ms) or RSTP/STP (IEEE 802.1w/D) supported
 - QoS, IGMP-snooping/GMRP, VLAN, LACP, SNMPv1/v2c/v3, RMON supported
- > Surge protection for serial, power, and Ethernet



Overview

The NPort® S8458 series combines an industrial device server with a full-function managed Ethernet switch by integrating 4 fiber ports, 4 Ethernet ports, and 4 RS-232/422/485 serial ports, allowing you to easily install, manage, and maintain the product. Combining a

device server and switch in one product allows you to save space in your cabinet, reduce overall power consumption, and reduce costs, since you will not need to purchase a switch and serial device server separately.

Supports the Full Range of NPort® Series Device Server Functions

The NPort® S8458 series supports the complete array of NPort® series device server functions. You can network your existing serial devices by connecting up to 4 serial devices through each of the 8

Ethernet ports, with only basic configuration required. In addition, data transmission between the serial and Ethernet interfaces is bi-directional.

Full-function Managed Ethernet Switch


The NPort® S8458 series has a built-in full-function managed Ethernet switch that supports QoS, IGMP-snooping/GMRP, VLAN, Port Trunking, SNMPv1/v2c/v3, and IEEE 802.1X, allowing you to handle virtually any kind of application. Ethernet redundancy, which is used

to increase the reliability and availability of your industrial Ethernet network, is provided by Moxa's own Turbo Ring and Turbo Chain technology (recovery time < 20 ms) or RSTP/STP (IEEE 802.1w/D).

Ring Redundancy at the Device Level

Device level communication networks for industrial automation are very critical since they are used to control and monitor device processes. The reliability of these communications depends on ring redundancy at the device level, which is designed to provide fast network fault detection and reconfiguration in order to support the most demanding control applications.

The NPort® S8458 series integrates a full function NPort® device server with an industrial switch to carry serial and Ethernet devices at the same time. In addition, the NPort® S8458 can also achieve ring redundancy with standard STP/RSTP and Moxa's proprietary Turbo Ring or Turbo Chain redundancy protocols. This all-in-one design can be used to optimize and simplify your device network, and enhance reliability.

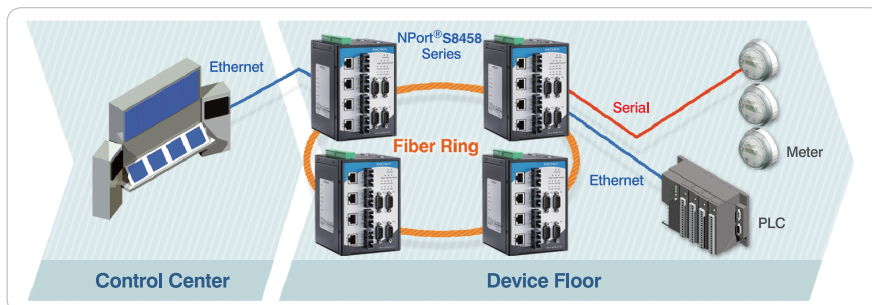

Rugged Design with Complete Protection



UL508 Safety

The NPort® S8458 series complies with the UL 508 standard, which covers safety requirements for industrial control equipment.



Level 4 ESD

The NPort® S8458 series supports high level, 15 KV, ESD protection to prevent damage from static electricity.



Full Surge Protection

The NPort® S8458 series is equipped with surge protection for power, Ethernet interface, and serial interface to protect against voltage spikes.

General Specifications

Port Summary

Serial Ports: 4 RS-232/422/485 ports
Ethernet Switch Ports: 4 RJ45 copper ports, 4 SC fiber ports
Console Ports: 1 (8-pin RJ45 connector)

Physical Characteristics

Housing: Metal IP40 protection
Dimensions: 93 × 144 × 125 mm (3.66 × 5.64 × 4.92 in)

Environmental Limits

Operating Temperature: -40 to 85° C (-40 to 185° F)
Ambient Relative Humidity: 5 to 95% (non-condensing)
Storage Temperature: -40 to 85° C (-40 to 185° F)

Power Requirements

Input Voltage: 12 to 48 VDC

Regulatory Approvals

Safety: UL60950-1
EMC: FCC Part 15 Subpart B Class A, CE Class A
EMI: EN 55022
EMS:
 EN 55024,
 EN 61000-4-2 (ESD) Level 4,
 EN 61000-4-3 (RS) Level 3,
 EN 61000-4-4 (EFT) Level 4,
 EN 61000-4-5 (Surge) Level 4,
 EN 61000-4-6 (CS) Level 3,
 EN 61000-4-8 Level 5,
 EN 61000-4-11

Warranty

Warranty Period: 5 years
Details: See www.moxa.com/warranty

Device Server Specifications

Serial Interface

Number of Ports: 4
Serial Standards: RS-232/422/485
Connector: DB9 male
Serial Line Protection: 15 KV ESD protection for all signals
RS-485 Data Direction Control: ADDC® (automatic data direction control)
Terminator for RS-485: 120 Ω
Console Port: Dedicated RS-232 console port (8-pin RJ45)

Serial Communication Parameters

Data Bits: 5, 6, 7, 8
Stop Bits: 1, 1.5, 2
Parity: None, Even, Odd, Space, Mark
Flow Control: RTS/CTS and XON/XOFF
Baudrate: 50 bps to 921.6 Kbps

Serial Signals

RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
RS-422: Tx+, Tx-, Rx+, Rx-, GND
RS-485-4w: Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w: Data+, Data-, GND

Software

Configuration Options: Web Console, Telnet Console, Serial Console, Windows Search Utility
Windows Real COM Drivers: Windows 95/98/ME/NT/2000, Windows XP/2003/Vista/2008/7 x86/x64, Embedded CE 5.0/6.0, XP Embedded
Fixed TTY Drivers: SCO Unix, SCO OpenServer, UnixWare 7, UnixWare 2.1, SVR 4.2, QNX 4.25, QNX 6, Solaris 10, FreeBSD, AIX 5.x
Linux Real TTY Drivers: Linux kernel 2.4.x, 2.6.x, 3.0.x
Operation Modes: Real COM, TCP Server, TCP Client, UDP, RFC2217
Management: SNMP MIB-II
IP Routing: Static, RIP-I, RIP-II
Reliability
Alert Tools: Built-in buzzer and RTC (real-time clock)
Automatic Reboot Trigger: Built-in WDT (watchdog timer)

Ethernet Switch Specifications

Ethernet Interface

Standards:

IEEE 802.3 for 10BaseT
 IEEE 802.3u for 100BaseT(X) and 100Base FX
 IEEE 802.3x for Flow Control
 IEEE 802.1D for Spanning Tree Protocol
 IEEE 802.1w for Rapid STP
 IEEE 802.1Q for VLAN Tagging
 IEEE 802.1p for Class of Service
 IEEE 802.1x for Authentication
 IEEE 802.3ad for Port Trunk with LACP

Network Protocols: ICMP, IP, TCP, UDP, ARP, Telnet, DNS, HTTP, SMTP, SNMP, IGMPv1/v2 device, GVRP, SNMPv1/v2c/v3, DHCP Server/Client, DHCP Option 82, BootP, TFTP, SNTP, SMTP, RARP, GMRP, LACP, RMON

MIB: MIB-II, Ethernet-Like MIB, P-BRIDGE MIB, Q-BRIDGE MIB, Bridge MIB, RSTP MIB, RMON MIB Group 1, 2, 3, 9

Flow Control: IEEE 802.3x flow control, back pressure flow control interface

Optical Fiber Interface

	100BaseFX	
	Multi-mode	Single-mode
Wavelength	1300 nm	1310 nm
Max. TX	-14 dBm	0 dBm
Min. TX	-20 dBm	-5 dBm
RX Sensitivity	-32 dBm	-34 dBm
Link Budget	12 dB	29 dB
Typical Distance	5 km ^a 4 km ^b	40 km ^c
Saturation	-6 dBm	-3 dBm

a. 50/125 μm, 800 MHz*km fiber optic cable
 b. 62.5/125 μm, 500 MHz*km fiber optic cable
 c. 9/125 μm, 3.5 PS/(nm*km) fiber optic cable

Switch Properties

Priority Queues: 4

Max. Number of Available VLANs: 64

VLAN ID Range: VID 1 to 4094

IGMP Groups: 256

Switch Interface


RJ45 Ports: 10/100BaseT(X) auto negotiation speed, F/H duplex mode, and auto MDI/MDI-X connection

DIP Switches: Turbo Ring, Master, Coupler, Reserve

Alarm Contact: 2 relay outputs with current carrying capacity of 1A @ 24 VDC

Pin Assignment


DB9 male connector



Serial Port (DB9 male connector)

PIN	RS-232	RS-422/485-4w	RS-485-2w
1	DCD	TxD-(A)	-
2	RxD	TxD+(B)	-
3	TxD	RxD+(B)	Data+(B)
4	DTR	RxD-(A)	Data-(A)
5	GND	GND	GND
6	DSR	-	-
7	RTS	-	-
8	CTS	-	-

8-pin RJ45 connector



Console Port (RJ45)

PIN	RS-232
1	DSR
2	RTS
3	GND
4	TxD
5	RxD
6	DCD
7	CTS
8	RTS

Ethernet Port (RJ45)

PIN	Signal
1	RXD+
2	RXD-
3	TXD+
4	-
5	-
6	TXD-
7	-
8	-

Ordering Information

Available Models

NPort® S8458-4S-SC-T: 4 RS-232/422/485 ports, 4 10/100M Ethernet ports, 4 100M single-mode fiber ports with SC connector, 12-48 VDC, -40 to 85°C operating temperature

Optional Accessories (can be purchased separately)

MXview: Moxa industrial network management software

Package Checklist

- 1 NPort S8458
- Two power jack to TB power cables
- Documentation and software CD
- Quick installation guide (printed)
- Warranty card