

IKS-6726-PoE Series

24+2G-port IEEE 802.3af PoE Gigabit modular managed Ethernet switches



- > Provides 15.4 W (per port) to up to 16 PoE ports when 48 VDC power is applied
- > Supports a total of 120 W for smart PoE power management when HV power is applied
- > PoE and Ethernet combo module supported, IEEE 802.3af-compliant
- > Meets UL 60950-1, NEMA TS2, EN50155/EN50121-4, and DNV/GL certifications
- > Turbo Ring and RSTP/STP for Ethernet Redundancy
- > Modular design lets you choose from a variety of media combinations
- > -40 to 75°C operating temperature range



Introduction

The IKS-6726-PoE series of industrial rackmount Ethernet switches are designed to meet the demands of mission critical applications for business and industry, such as traffic control systems (NEMA TS2), power automation, and critical facility surveillance. The IKS-6726-PoE comes standard with up to 16 10/100BaseT(X) 802.3af (PoE) compliant Ethernet ports and 2 combo Gigabit Ethernet ports. The IKS-6726-PoE Ethernet switches provide two kinds of power input source: 48 VDC and 110/220 VDC/VAC. The IKS-6726-PoE 48 VDC model supports up to 15.4 watts of power per PoE port, and allows power to be supplied to connected devices when AC power is not

readily available or is cost-prohibitive to provide locally. The IKS-6726-PoE HV model supports a total of 120 W for smart PoE power management when HV power is applied. When supplied with 120 W of power, the IKS-6726-PoE HV model can supply power to up to 16 PoE ports. The switches support a variety of management functions, including Turbo Ring, RSTP/STP, IGMP, VLAN, QoS, RMON, bandwidth management, and port mirroring, and are designed especially for security automation applications such as IP surveillance and gate of entry systems, which can benefit from a scalable backbone construction and Power-over-Ethernet support.

Features and Benefits

- Advanced PoE management function
- IEEE 802.3af-compliant PoE and Ethernet combo ports
- IPv6 Ready logo awarded (IPv6 Logo Committee certified)
- IEEE 1588 PTP (Precision Time Protocol) for precise time synchronization of networks
- DHCP Option 82 for IP address assignment with different policies
- Modbus/TCP industrial Ethernet protocol supported
- IEC 61850 GOOSE messaging compliance
- Turbo Ring and RSTP/STP (IEEE 802.1w/D) supported
- IGMP snooping and GMRP for filtering multicast traffic from industrial Ethernet protocols
- IEEE 802.1Q VLAN and GVRP protocols to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- IEEE 802.3ad, LACP for optimum bandwidth utilization
- SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- SNMPv1/v2c/v3 for different levels of network management
- RMON for efficient network monitoring and proactive capability
- Bandwidth management to prevent unpredictable network status with "Lock port" to restrict access to authorized MAC addresses
- Port mirroring for online debugging
- Automatic warning by exception through email, relay output
- Automatic recovery of connected device's IP addresses
- Line-swap fast recovery
- Configurable by Web browser, Telnet/serial console, Windows utility, and ABC-01 automatic backup configurator


Specifications

Technology

Standards:

- IEEE 802.3af for Power-over-Ethernet
- IEEE 802.3 for 10BaseT
- IEEE 802.3u for 100BaseT(X) and 100Base FX
- IEEE 802.3ab for 1000BaseT(X)
- IEEE 802.3z for 1000BaseSX/LX/LHX/ZX
- IEEE 802.3x for Flow Control
- IEEE 802.1D for Spanning Tree Protocol
- IEEE 802.1w for Rapid STP
- IEEE 802.1Q for VLAN Tagging
- IEEE 802.1p for Class of Service
- IEEE 802.1X for Authentication
- IEEE 802.3ad for Port Trunk with LACP

IKS-6726-PoE Modular Rackmount Ethernet Switch System

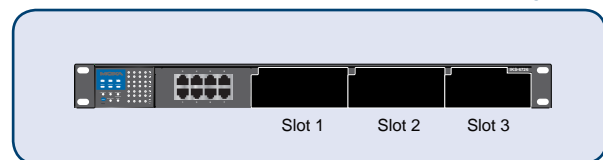

Protocols: IGMPv1/v2 device, GMRP, GVRP, SNMPv1/v2c/v3, DHCP Server/Client, BootP, TFTP, SNTP, SMTP, RARP, RMON, HTTP, HTTPS, Telnet, SSH, Syslog (Available Soon: DHCP Option 66/67/82, Modbus/TCP, LLDP, IEEE 1588 PTP, IPv6)

MIB: MIB-II, Ethernet-like MIB, P-BRIDGE MIB, Q-BRIDGE MIB, Bridge MIB, RSTP MIB, RMON MIB Group 1, 2, 3, 9
Flow Control: IEEE 802.3x flow control, back pressure flow control

Switch Properties

Priority Queues: 4
Max. Number of Available VLANs: 64
VLAN ID Range: VID 1 to 4094
IGMP Groups: 256

Interface

Fast Ethernet: Slots 1 and 2 for any combination of 4, 6, 7, or 8-port PM-7200 fast Ethernet modules with 10/100BaseT(X) (TP/PoE/M12 interface), 100BaseFX (SC/ST connector), or 100BaseSFP
Gigabit Ethernet: Slot 3 for 2-port PM-7200 Gigabit Ethernet combo module with 10/100/1000BaseT(X) or 1000BaseSFP ports
Console Port: RS-232 (RJ45 connector)
System LED Indicators: STAT, PWR1, PWR2, FAULT, MASTER, COUPLER

Mode LED Indicators: LNK/ACT, FDX/HDX, RING PORT, COUPLER PORT, SPEED, PoE on module

Alarm Contact: 1 relay output with current carrying capacity of 3 A @ 30 VDC or 3 A @ 240 VAC

Power Requirements

Input Voltage: 24 VDC (18 to 36 V), 48 VDC (36 to 72 V), or 110/220 VDC/VAC (88 to 300 VDC, 85 to 264 VAC)

Input Current:

- Max. 5.8 A @ 48 VDC (supports up to 16 ports at 15.4 W per PoE port)
- Max. 1.85/0.94 A @ 110/220 VDC (120 W total for PoE ports)
- Max. 1.54/0.78 A @ 110/220 VAC (120 W total for PoE ports)

Overload Current Protection: Present
Connection: 10-contact terminal block
Reverse Polarity Protection: Present

Physical Characteristics

Housing: IP30 protection
Dimensions: 440 x 44 x 325 mm (17.32 x 1.73 x 12.80 in)
Weight: 4200 g
Installation: 19" rack mounting

Environmental Limits

Operating Temperature: -40 to 75°C (-40 to 167°F), cold start requires min. of 100 VAC at -40°C
Storage Temperature: -40 to 85°C (-40 to 185°F)
Ambient Relative Humidity: 5 to 95% (non-condensing)

Regulatory Approvals


Safety: UL60950-1, CSA C22.2 No. 60950-1, EN60950-1 (Pending)
EMI: FCC Part 15, CISPR (EN55022) class A (Pending)
Maritime: DNV (Pending), GL (Pending)
Traffic Control: NEMA TS2 (Pending)
Rail Traffic: EN50155/EN50121-4 (Pending)

Note: Please check Moxa's website for the most up-to-date certification status.

Warranty

Warranty Period: 5 years
Details: See www.moxa.com/warranty

Dimensions (unit = mm)

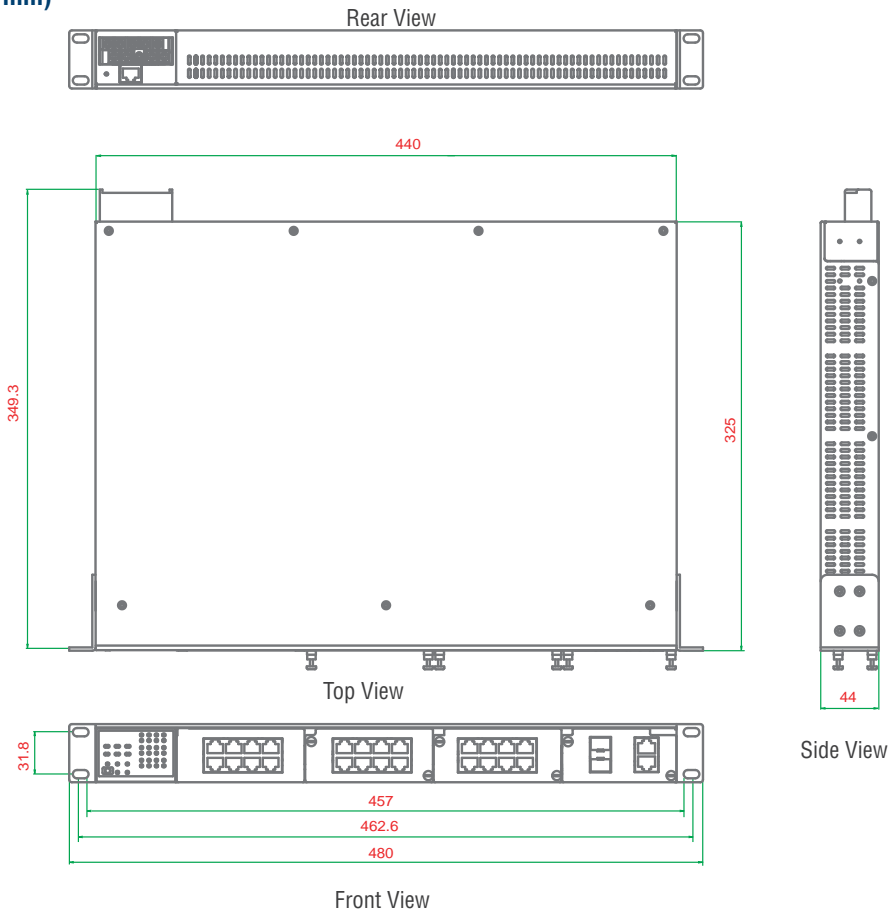

Ordering Information

Step 1: Select Ethernet switch system

Step 2: Select interface modules

IKS-6726-PoE with power supply



PM-7200 series
(Gigabit or fast Ethernet)

Note: The IKS-6726-PoE Ethernet switch system is delivered without interface modules. Please see pages 4 and 5 to determine which PM-7200 interface modules are suitable for your application.

IKS-6726-PoE Modular Rackmount Ethernet Switch System

Modular managed rackmount Ethernet switch system with 8 10/100BaseT(X) ports, 2 slots for fast Ethernet modules (PoE), and 1 slot for Gigabit Ethernet modules. Supports up to 24+2G ports and up to 16 PoE ports, -40 to 75°C operating temperature

Available Models	Power Supply			
	Isolated Power Supply 1		Isolated Power Supply 2	
	48 VDC (36 to 72 V)	HV: 88 to 300 VDC and 85 to 264 VAC	48 VDC (36 to 72 V)	HV: 88 to 300 VDC and 85 to 264 VAC
IKS-6726-PoE-F-48-T	1	---	---	---
IKS-6726-PoE-F-48-48-T	1	---	1	---
IKS-6726-PoE-F-48-HV-T	1	---	---	1
IKS-6726-PoE-F-HV-T	---	1	---	---
IKS-6726-PoE-F-HV-HV-T	---	1	---	1

Note: The HV power module supplies a total of 30 W to the system and 120 W for PoE power management.

Gigabit/Fast Ethernet Module Compatibility Chart for the IKS-6726-PoE

	Interface Module																								
	PM-7200-4GTXSFP	PM-7200-2GTXSFP	PM-7200-1MSC	PM-7200-1MST	PM-7200-2MSC	PM-7200-2MST	PM-7200-1SSC	PM-7200-2SSC	PM-7200-8TX	PM-7200-2MSC4TX	PM-7200-2MST4TX	PM-7200-2SSC4TX	PM-7200-4MSC2TX	PM-7200-4MST2TX	PM-7200-4SSC2TX	PM-7200-6MSC	PM-7200-6MST	PM-7200-6SSC	PM-7200-1LSC6TX	PM-7200-1MST6TX	PM-7200-1SSC6TX	PM-7200-1MSC6TX	PM-7200-8PoE	PM-7200-8SFP	PM-7200-4M12
Slot 1	---	---	---	---	---	---	---	---	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Slot 2	---	---	---	---	---	---	---	---	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Slot 3	---	✓	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Optional Accessories (can be purchased separately)

EDS-SNMP OPC Server Pro: OPC server software that works with all SNMP devices

ABC-01: Configuration backup and restoration tool for managed Ethernet switches, 0 to 60°C operating temperature

PM-7200 Series

Gigabit and fast Ethernet modules for PT and IKS series switches

Specifications

Gigabit Ethernet Interface Modules, PM-7200-2G/4G series



PM-7200-4GTXSFP



PM-7200-2GTXSFP

Interface

RJ45 Ports: 10/100/1000BaseT(X) auto negotiation speed, and auto MDI/MDI-X connection

Fiber Ports: 1000BaseSFP slots

Note: The PM-7200-2G/4G series Gigabit Ethernet combo modules support 2 or 4 SFP slots.

Fast Ethernet Interface Modules, PM-7200 series



PM-7200-8TX



PM-7200-6MSC
PM-7200-6SSC



PM-7200-6MST



PM-7200-4MSC2TX
PM-7200-4SSC2TX



PM-7200-4MST2TX



PM-7200-2MSC4TX
PM-7200-2SSC4TX



PM-7200-2MST4TX



PM-7200-1LSC6TX



PM-7200-2MSC
PM-7200-2SSC



PM-7200-2MST



PM-7200-1MSC
PM-7200-1SSC



PM-7200-1MST



PM-7200-1MST6TX



PM-7200-1MSC6TX
PM-7200-1SSC6TX



COMING SOON

PM-7200-8PoE



PM-7200-8SFP



PM-7200-4M12

Interface

RJ45 Ports: 10/100BaseT(X) auto negotiation speed, F/H duplex mode, and auto MDI/MDI-X connection

Fiber Ports: 100BaseFX ports (SC/ST or SFP LC connector)

PoE Ports: IEEE 802.3af Power-over-Ethernet Technology, provide up to 15.4 watts per port

M12 ports: 10/100BaseT(X) auto negotiation speed, and auto MDI/MDI-X connection

Optical Fiber

	100BaseFX		
	Multi-mode	Single-mode	Single-mode, 80 km
Wavelength	1300 nm	1310 nm	1550 nm
Max. TX	-10 dBm	0 dBm	0 dBm
Min. TX	-20 dBm	-5 dBm	-5 dBm
RX Sensitivity	-32 dBm	-34 dBm	-34 dBm
Link Budget	12 dB	29 dB	29 dB
Typical Distance	5 km ^a 4 km ^b	40 km ^c	80 km ^d
Saturation	-6 dBm	-3 dBm	-3 dBm

a. 50/125 μm, 800 MHz*km fiber optic cable

b. 62.5/125 μm, 500 MHz*km fiber optic cable

c. 9/125 μm single-mode fiber optic cable

d. 9/125 μm single-mode fiber optic cable (80 km)

Ordering Information

Gigabit Ethernet Modules for PT and IKS Series Rackmount Ethernet Switches, PM-7200-2G/4G Series

Available Models	Port Interface	
	Combo Port, 10/100/1000BaseT(X) or 1000BaseSFP*	
PM-7200-2GTXSFP	2	
PM-7200-4GTXSFP	4	

*The PM-7200-2G/4G series Gigabit Ethernet combo modules support 2 or 4 SFP slots.

Rackmount Ethernet Switch System and Interface Module Compatibility Chart

Product Model	Interface Modules																							
	PM-7200-4GTXSFP	PM-7200-2GTXSFP	PM-7200-1MSC	PM-7200-1MST	PM-7200-2MSC	PM-7200-2MST	PM-7200-1SSC	PM-7200-2SSC	PM-7200-8TX	PM-7200-2MSC4TX	PM-7200-2MST4TX	PM-7200-2SSC4TX	PM-7200-4MSC2TX	PM-7200-4MST2TX	PM-7200-4SSC2TX	PM-7200-6MSC	PM-7200-6MST	PM-7200-6SSC	PM-7200-1MSC6TX	PM-7200-1MST6TX	PM-7200-1SSC6TX	PM-7200-1LSC6TX	PM-7200-8PoE	PM-7200-8SFP*
PT-7828	√	√	---	---	---	---	---	---	√	√	√	√	√	√	√	√	√	√	√	√	√	---	√	√
PT-7728	√	√	---	---	---	---	---	---	√	√	√	√	√	√	√	√	√	√	√	√	√	---	√	√
PT-7710	---	√	√	√	√	√	√	√	√	√	√	√	√	√	√	√	√	√	√	√	√	---	√	√
PT-7324	---	√	√	√	√	√	√	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
IKS-6726	---	√	---	---	---	---	---	√	√	√	√	√	√	√	√	√	√	√	√	√	√	---	√	√
IKS-6726-PoE	---	√	---	---	---	---	---	√	√	√	√	√	√	√	√	√	√	√	√	√	√	√	√	√
IKS-6324	---	√	√	√	√	√	√	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

* If you are using an SFP-1FELLC module, the operating temperature is limited to -40 to 75°C (-40 to 167°F).

Fast Ethernet Modules for PT and IKS Series Rackmount Ethernet Switches, PM-7200 Series

Available Models	Port Interface							
	10/100BaseT(X)			100BaseFX				100BaseSFP
	TP	PoE	M12	Multi-mode, SC Connector	Multi-mode, ST Connector	Single-mode, SC Connector	Single-mode, SC Connector, 80 km	
PM-7200-8TX	8	---	---	---	---	---	---	---
PM-7200-6MSC	---	---	---	6	---	---	---	---
PM-7200-6MST	---	---	---	---	6	---	---	---
PM-7200-6SSC	---	---	---	---	---	6	---	---
PM-7200-4MSC2TX	2	---	---	4	---	---	---	---
PM-7200-4MST2TX	2	---	---	---	4	---	---	---
PM-7200-4SSC2TX	2	---	---	---	---	4	---	---
PM-7200-2MSC4TX	4	---	---	2	---	---	---	---
PM-7200-2MST4TX	4	---	---	---	2	---	---	---
PM-7200-2SSC4TX	4	---	---	---	---	2	---	---
PM-7200-1LSC6TX	6	---	---	---	---	---	1	---
PM-7200-2MSC	---	---	---	2	---	---	---	---
PM-7200-2MST	---	---	---	---	2	---	---	---
PM-7200-2SSC	---	---	---	---	---	2	---	---
PM-7200-1MSC	---	---	---	1	---	---	---	---
PM-7200-1MST	---	---	---	---	1	---	---	---
PM-7200-1SSC	---	---	---	---	---	1	---	---
PM-7200-1MSC6TX	6	---	---	1	---	---	---	---
PM-7200-1MST6TX	6	---	---	---	1	---	---	---
PM-7200-1SSC6TX	6	---	---	---	---	1	---	---
PM-7200-8PoE	---	8	---	---	---	---	---	---
PM-7200-8SFP	---	---	---	---	---	---	---	8
PM-7200-4M12	---	---	4	---	---	---	---	---

SFP-1G Series

1G-port Gigabit Ethernet SFP modules



- > Compliant with IEEE 802.3z
- > Differential LVPECL inputs and outputs
- > Single 3.3 V power supply
- > TTL signal detect indicator
- > Hot pluggable
- > Class 1 laser product, complies with EN60825-1



Specifications

Interface

Ethernet Ports: 1

Connectors: Duplex LC Connector or Simplex LC Connector (WDM-type only)

Note: WDM-type SFP modules must be used in pairs (e.g., SFP-1GXXALC and SFP-1GXXBLC)

Optical Fiber

	Gigabit Ethernet												
	SFP-SX	SFP-LSX	SFP-LX	SFP-LH	SFP-LHX	SFP-ZX	SFP-EZX	SFP-10A	SFP-10B	SFP-20A	SFP-20B	SFP-40A	SFP-40B
Wave-length	850 nm	1310 nm	1310 nm	1310 nm	1310 nm	1550 nm	1550 nm	TX 1310 nm, RX 1550 nm	TX 1550 nm, RX 1310 nm	TX 1310 nm, RX 1550 nm	TX 1550 nm, RX 1310 nm	TX 1310 nm, RX 1550 nm	TX 1550 nm, RX 1310 nm
Max. TX	-4 dBm	-1 dBm	-3 dBm	-2 dBm	1 dBm	5 dBm	5 dBm	-3 dBm		-2 dBm		2 dBm	
Min. TX	-9.5 dBm	-9 dBm	-9.5 dBm	-8 dBm	-4 dBm	0 dBm	0 dBm	-9 dBm		-8 dBm		-3 dBm	
RX Sensitivity	-18 dBm	-19 dBm	-20 dBm	-23 dBm	-24 dBm	-24 dBm	-30 dBm	-21 dBm		-23 dBm		-23 dBm	
Link Budget	8.5 dB	10 dB	10.5 dB	15 dB	20 dB	24 dB	30 dB	12 dB		15 dB		20 dB	
Typical Distance	550 m ^a	2 km ^b	10 km ^c	30 km ^c	40 km ^c	80 km ^c	110 km ^c	10 km ^c		20 km ^c		40 km ^c	
Saturation	0 dBm	-3 dBm	-3 dBm	-3 dBm	-3 dBm	-3 dBm	-3 dBm	-1 dBm		-1 dBm		-1 dBm	

a. 50/125 μm, 400 MHz * km or 62.5/125 μm, 500 MHz * km @ 850 nm multi-mode fiber optic cable

b. 62.5/125 μm, 750 MHz * km @ 1310 nm multi-mode fiber optic cable

c. 9/125 μm single-mode fiber optic cable

Environmental Limits

Operating Temperature:

Standard Models: 0 to 60°C (32 to 140°F)

Wide Operating Temp. Models: -40 to 85°C (-40 to 185°F)

Storage Temperature: -40 to 85°C (-40 to 185°F)

Ambient Relative Humidity: 5 to 95% (non-condensing)

Regulatory Approvals


Safety: UL, TÜV

Warranty

Warranty Period: 3 years

Details: See www.moxa.com/warranty

Dimensions (unit = mm)

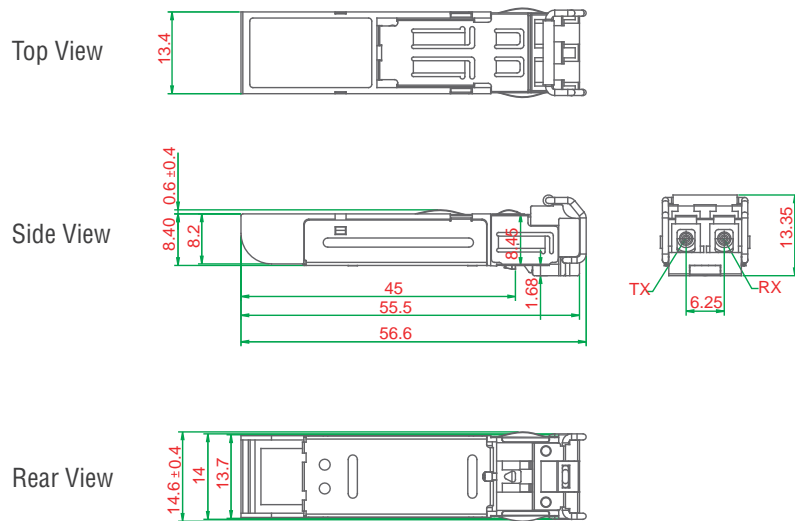

Ordering Information

SFP Modules

Available Models		Port Interface						
Standard Temperature (0 to 60°C)	Wide Temperature (-40 to 85°C)	1000BaseSX, LC Connector, 0.5 km	1000BaseLSX, LC Connector, 2 km	1000BaseLX, LC Connector, 10 km	1000BaseLH, LC Connector, 30 km	1000BaseLHX, LC Connector, 40 km	1000BaseZX, LC Connector, 80 km	1000BaseEZ, LC Connector, 110 km
SFP-1GSXLC	SFP-1GSXLC-T*	1	---	---	---	---	---	---
SFP-1GLSXLC	SFP-1GLSXLC-T	---	1	---	---	---	---	---
SFP-1GLXLC	SFP-1GLXLC-T	---	---	1	---	---	---	---
SFP-1GLHLC	SFP-1GLHLC-T	---	---	---	1	---	---	---
SFP-1GLHXL	SFP-1GLHXL-T	---	---	---	---	1	---	---
SFP-1GZXLC	SFP-1GZXLC-T	---	---	---	---	---	1	---
SFP-1GEZLC	---	---	---	---	---	---	---	1

Note: SFP-1GSXLC-T: -20 to 75°C operating temperature

WDM-type (BiDi) SFP Modules

Available Models		Port Interface					
Standard Temperature (0 to 60°C)	Wide Temperature (-40 to 85°C)	1000BaseSFP, LC Connector, 10 km		1000BaseSFP, LC Connector, 20 km		1000BaseSFP, LC Connector, 40 km	
		TX 1310 nm, RX 1550 nm	TX 1550 nm, RX 1310 nm	TX 1310 nm, RX 1550 nm	TX 1550 nm, RX 1310 nm	TX 1310 nm, RX 1550 nm	TX 1550 nm, RX 1310 nm
SFP-1G10ALC	SFP-1G10ALC-T	1	---	---	---	---	---
SFP-1G10BLC	SFP-1G10BLC-T	---	1	---	---	---	---
SFP-1G20ALC	SFP-1G20ALC-T	---	---	1	---	---	---
SFP-1G20BLC	SFP-1G20BLC-T	---	---	---	1	---	---
SFP-1G40ALC	SFP-1G40ALC-T	---	---	---	---	1	---
SFP-1G40BLC	SFP-1G40BLC-T	---	---	---	---	---	1

The SFP-1G series modules can be used with the following products

- EDS-728/828 series: IM-2GSFP series Gigabit Ethernet interface modules
- EDS-G509 series: 9G-port full Gigabit managed Ethernet switches
- EDS-518A series: 16+2G-port Gigabit managed Ethernet switches
- EDS-510A series: 7+3G-port Gigabit managed Ethernet switches
- EDS-P510 series: 7+3G-port Gigabit PoE managed Ethernet switches
- PT and IKS series: PM-7200-2G/4G series Gigabit Ethernet interface modules
- EDS-G308 series: 8G-port full Gigabit unmanaged Ethernet switches
- IMC-101G series: Industrial Gigabit media converters