

PT-7324 Series

IEC 61850-3 22+2G-port Gigabit smart rackmount Ethernet switches



- > IEC 61850-3, IEEE 1613 (power substations), NEMA TS2 (traffic control systems), and EN50121-4 (railway applications) compliant
- > Port-based VLAN to enhance security/network performance
- > 802.1p priority queues, port-based QoS
- > Smart web-based management makes configuration easy
- > Universal power supply range, 12/24/48 VDC or 110/220 VDC/VAC
- > -40 to 85°C operating temperature range



Introduction

The PowerTrans PT-7324 smart Ethernet switch is designed to meet the demands of power substation automation systems (IEC 61850-3, IEEE 1613), traffic control systems (NEMA TS2), and railway applications (EN50121-4). The PT-7324 is also equipped with smart "Class of Service" features suitable for multimedia applications, and port-based

VLAN features that can be used to segment your network without being restricted by physical connections. If you do not want to receive too many broadcast packets, the broadcast storm filtering feature will discard broadcast packets if the number of such packets exceeds a threshold in a preset period of time.

Features and Benefits

- Port-based VLAN to ease network planning
- 802.1p priority queues and port-based QoS to increase determinism
- Broadcast storm filtering

Specifications

Technology

Standards:

- IEEE 802.3 for 10BaseT
- IEEE 802.3u for 100BaseT(X) and 100Base FX
- IEEE 802.3ab for 1000BaseT(X)
- IEEE 802.3z for 1000BaseSX/LX/LHX/ZX
- IEEE 802.3x for Flow Control
- IEEE 802.1p for Class of Service

Flow Control: IEEE 802.3x flow control, back pressure flow control

Switch Properties

Priority Queues: 2

Max. Number of Available VLANs: 24

Interface

RJ45 Ports: 10/100BaseT(X) or 10/100/1000BaseT(X) auto negotiation speed, F/H duplex mode and auto MDI/MDI-X connection

Fiber Ports: 100BaseFX (SC/ST connector) or 1000BaseSFP slots

LED Indicators: STAT, PWR1, PWR2, FAULT, LNK/ACT, FDX/HDX, SPEED

Alarm Contact: 1 relay output with current carrying capacity of 3 A @ 30 VDC or 3 A @ 240 VAC

Note: Slot 1 for a 2-port PM-7200 Gigabit Ethernet combo module, or 1 or 2-port PM-7200 fast Ethernet module.

Power Requirements

Input Voltage:


- 12/24/48 VDC (9 to 60 V)
- 110/220 VDC/VAC (88 to 300 VDC and 85 to 264 VAC)

Input Current: (all ports are equipped with fiber)

- Max. 0.68 A @ 24 VDC
- Max. 0.35 A @ 48 VDC
- Max. 0.17/0.11 A @ 110/220 VDC
- Max. 0.33/0.23 A @ 110/220 VAC

Overload Current Protection: Present

Smart Rackmount Ethernet Switch System, PT-7324

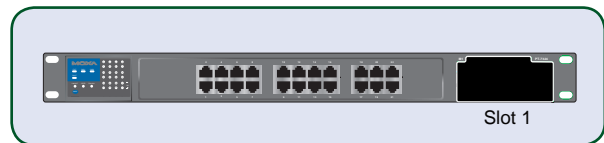

Connection: 10-pin terminal blocks

Reverse Polarity Protection: Present

Physical Characteristics

Housing: IP30 protection

Dimensions: 440 x 44 x 254 mm (17.32 x 1.73 x 10.00 in)

Weight: 3300 g

Installation: 19" rack mounting

Environmental Limits

Operating Temperature: -40 to 85°C (-40 to 185°F)

Storage Temperature: -40 to 85°C (-40 to 185°F)

Ambient Relative Humidity: 5 to 95% (non-condensing)

Regulatory Approvals

Safety: UL60950-1, CSA C22.2 No. 60950-1, EN60950-1 (Pending)

EMI: FCC Part 15, CISPR (EN55022) class A

Power Automation: IEC 61850-3, IEEE 1613

Maritime: DNV (Pending), GL (Pending)

Traffic Control: NEMA TS2 (Pending)

Rail Traffic: EN50155/EN50121-4


Note: Please check Moxa's website for the most up-to-date certification status.

Warranty

Warranty Period: 5 years

Details: See www.moxa.com/warranty

Dimensions (unit = mm)

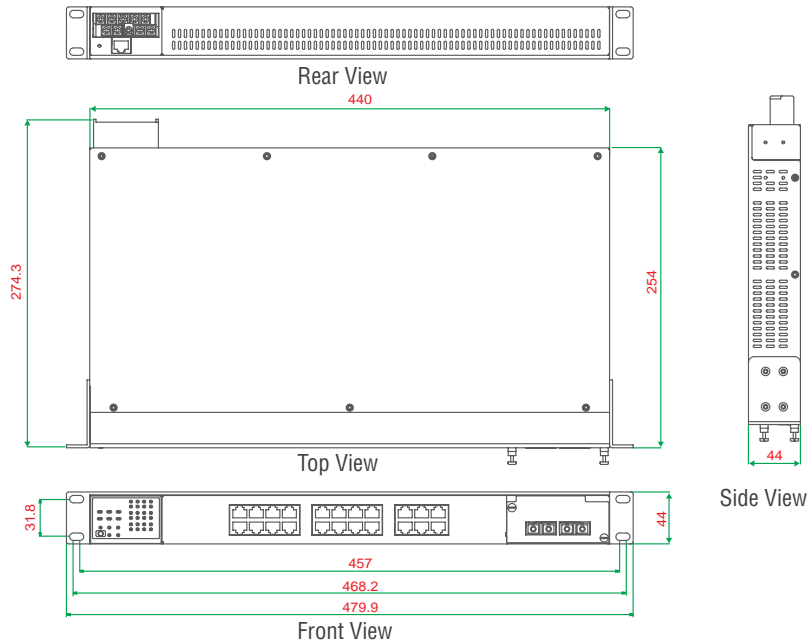

Ordering Information

Step 1: Select Ethernet switch system

Step 2: Select interface modules

PT-7324 with power supply



PM-7200 modules
(Gigabit or fast Ethernet)

Note: The PT-7324 Ethernet switch system is delivered without interface module. See pages 3 and 4 to choose PM-7200 interface modules.

PT-7324 Smart Rackmount Ethernet Switch System

The PT-7324 switch system consists of 4 smart rackmount Ethernet switch systems with 22 10/100BaseT(X) ports, and 1 slot for a fast Ethernet or Gigabit Ethernet module. A total of 24 or 22+2G ports can be installed, and the switch can be used in a temperature range from -40 to 85°C.

Available Models		Power Supply	
Front Cabling, Front Display	Rear Cabling, Front Display	LV: 12/24/48 VDC (9 to 60 V) (Dual power inputs)	HV: 88 to 300 VDC and 85 to 264 VAC, isolated
PT-7324-F-LV	PT-7324-R-LV	1	---
PT-7324-F-HV	PT-7324-R-HV	---	1

Note: The PT-7324 Ethernet switch systems provide 1 slot for a Gigabit Ethernet or fast Ethernet interface module. See page 4-31 to select the PM-7200 series Gigabit Ethernet and fast Ethernet interface modules that you need for your own application.

PT-7324-F series
(Front Cabling, Front Display)



PT-7324-R series
(Rear Cabling, Front Display)



Gigabit/Fast Ethernet Modules for the PT-7324


Interface Modules	
	Module Model
Slot 1	PM-7200-2GTXSFP
	PM-7200-1MSC
	PM-7200-1MST
	PM-7200-1SSC
	PM-7200-2MSC
	PM-7200-2MST
	PM-7200-2SSC

PM-7200 Series

Gigabit and fast Ethernet modules for PT and IKS series switches

Specifications

Gigabit Ethernet Interface Modules, PM-7200-2G/4G series

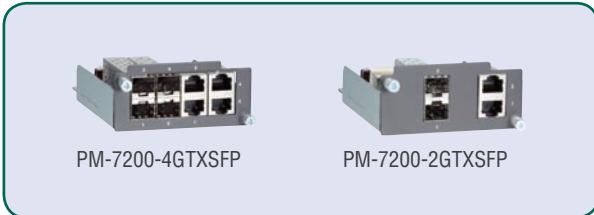


Interface

RJ45 Ports: 10/100/1000BaseT(X) auto negotiation speed, and auto MDI/MDI-X connection

Fiber Ports: 1000BaseSFP slots

Note: The PM-7200-2G/4G series Gigabit Ethernet combo modules support 2 or 4 SFP slots.

Fast Ethernet Interface Modules, PM-7200 series

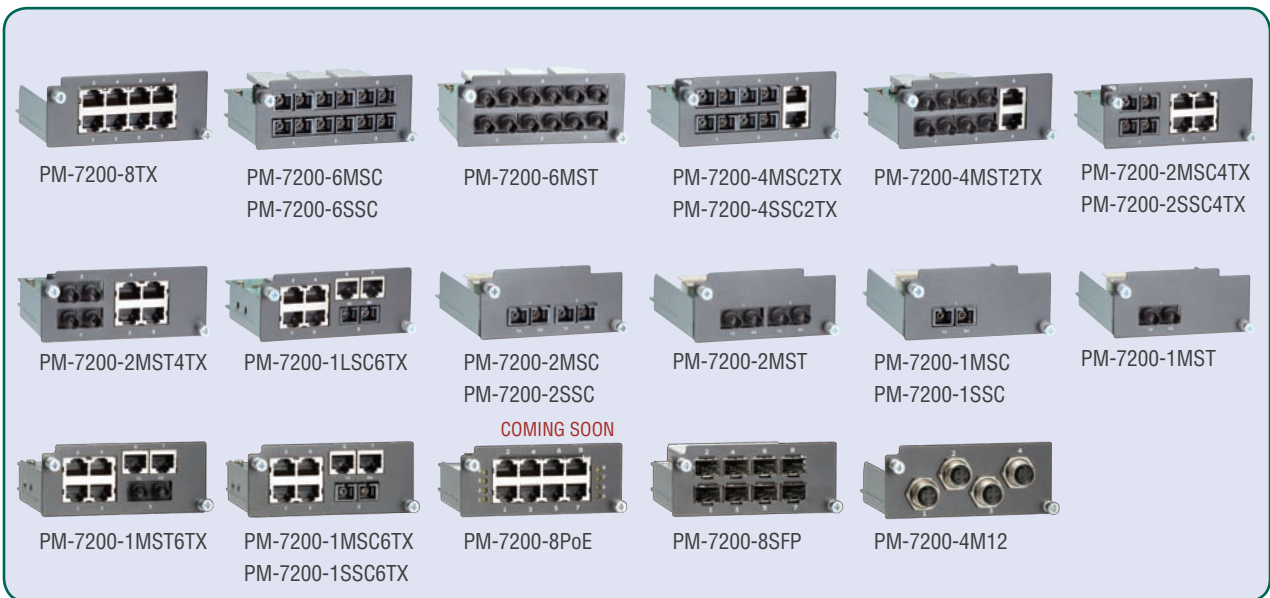

Interface

RJ45 Ports: 10/100BaseT(X) auto negotiation speed, F/H duplex mode, and auto MDI/MDI-X connection

Fiber Ports: 100BaseFX ports (SC/ST or SFP LC connector)

PoE Ports: IEEE 802.3af Power-over-Ethernet Technology, provide up to 15.4 watts per port

M12 ports: 10/100BaseT(X) auto negotiation speed, and auto MDI/MDI-X connection

Optical Fiber

	100BaseFX		
	Multi-mode	Single-mode	Single-mode, 80 km
Wavelength	1300 nm	1310 nm	1550 nm
Max. TX	-10 dBm	0 dBm	0 dBm
Min. TX	-20 dBm	-5 dBm	-5 dBm
RX Sensitivity	-32 dBm	-34 dBm	-34 dBm
Link Budget	12 dB	29 dB	29 dB
Typical Distance	5 km ^a 4 km ^b	40 km ^c	80 km ^d
Saturation	-6 dBm	-3 dBm	-3 dBm

a. 50/125 μm, 800 MHz*km fiber optic cable
 b. 62.5/125 μm, 500 MHz*km fiber optic cable
 c. 9/125 μm single-mode fiber optic cable
 d. 9/125 μm single-mode fiber optic cable (80 km)

Ordering Information

Gigabit Ethernet Modules for PT and IKS Series Rackmount Ethernet Switches, PM-7200-2G/4G Series

Available Models	Port Interface	
	Combo Port, 10/100/1000BaseT(X) or 1000BaseSFP*	
PM-7200-2GTXSFP	2	
PM-7200-4GTXSFP	4	

*The PM-7200-2G/4G series Gigabit Ethernet combo modules support 2 or 4 SFP slots.

Rackmount Ethernet Switch System and Interface Module Compatibility Chart

Product Model	Interface Modules																								
	PM-7200-4GTXSFP	PM-7200-2GTXSFP	PM-7200-1MSC	PM-7200-1MST	PM-7200-2MSC	PM-7200-2MST	PM-7200-1SSC	PM-7200-2SSC	PM-7200-8TX	PM-7200-2MSC4TX	PM-7200-2MST4TX	PM-7200-2SSC4TX	PM-7200-4MSC2TX	PM-7200-4MST2TX	PM-7200-4SSC2TX	PM-7200-6MSC	PM-7200-6MST	PM-7200-6SSC	PM-7200-1MSC6TX	PM-7200-1MST6TX	PM-7200-1SSC6TX	PM-7200-1LSC6TX	PM-7200-8PoE	PM-7200-8SFP*	PM-7200-4M12
PT-7828	√	√	---	---	---	---	---	---	√	√	√	√	√	√	√	√	√	√	√	√	√	---	√	√	
PT-7728	√	√	---	---	---	---	---	---	√	√	√	√	√	√	√	√	√	√	√	√	√	√	---	√	√
PT-7710	---	√	√	√	√	√	√	√	√	√	√	√	√	√	√	√	√	√	√	√	√	---	√	√	
PT-7324	---	√	√	√	√	√	√	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
IKS-6726	---	√	---	---	---	---	---	---	√	√	√	√	√	√	√	√	√	√	√	√	√	---	√	√	
IKS-6726-PoE	---	√	---	---	---	---	---	---	√	√	√	√	√	√	√	√	√	√	√	√	√	√	√	√	
IKS-6324	---	√	√	√	√	√	√	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	

* If you are using an SFP-1FELLC module, the operating temperature is limited to -40 to 75°C (-40 to 167°F).

Fast Ethernet Modules for PT and IKS Series Rackmount Ethernet Switches, PM-7200 Series

Available Models	Port Interface							
	10/100BaseT(X)			100BaseFX				100BaseSFP
	TP	PoE	M12	Multi-mode, SC Connector	Multi-mode, ST Connector	Single-mode, SC Connector	Single-mode, SC Connector, 80 km	
PM-7200-8TX	8	---	---	---	---	---	---	---
PM-7200-6MSC	---	---	---	6	---	---	---	---
PM-7200-6MST	---	---	---	---	6	---	---	---
PM-7200-6SSC	---	---	---	---	---	6	---	---
PM-7200-4MSC2TX	2	---	---	4	---	---	---	---
PM-7200-4MST2TX	2	---	---	---	4	---	---	---
PM-7200-4SSC2TX	2	---	---	---	---	4	---	---
PM-7200-2MSC4TX	4	---	---	2	---	---	---	---
PM-7200-2MST4TX	4	---	---	---	2	---	---	---
PM-7200-2SSC4TX	4	---	---	---	---	2	---	---
PM-7200-1LSC6TX	6	---	---	---	---	---	1	---
PM-7200-2MSC	---	---	---	2	---	---	---	---
PM-7200-2MST	---	---	---	---	2	---	---	---
PM-7200-2SSC	---	---	---	---	---	2	---	---
PM-7200-1MSC	---	---	---	1	---	---	---	---
PM-7200-1MST	---	---	---	---	1	---	---	---
PM-7200-1SSC	---	---	---	---	---	1	---	---
PM-7200-1MSC6TX	6	---	---	1	---	---	---	---
PM-7200-1MST6TX	6	---	---	---	1	---	---	---
PM-7200-1SSC6TX	6	---	---	---	---	1	---	---
PM-7200-8PoE	---	8	---	---	---	---	---	---
PM-7200-8SFP	---	---	---	---	---	---	---	8
PM-7200-4M12	---	---	4	---	---	---	---	---

SFP-1G Series

1G-port Gigabit Ethernet SFP modules



- > Compliant with IEEE 802.3z
- > Differential LVPECL inputs and outputs
- > Single 3.3 V power supply
- > TTL signal detect indicator
- > Hot pluggable
- > Class 1 laser product, complies with EN60825-1



Specifications

Interface

Ethernet Ports: 1

Connectors: Duplex LC Connector or Simplex LC Connector (WDM-type only)

Note: WDM-type SFP modules must be used in pairs (e.g., SFP-1GXXALC and SFP-1GXXBLC)

Optical Fiber

	Gigabit Ethernet												
	SFP-SX	SFP-LSX	SFP-LX	SFP-LH	SFP-LHX	SFP-ZX	SFP-EZX	SFP-10A	SFP-10B	SFP-20A	SFP-20B	SFP-40A	SFP-40B
Wave-length	850 nm	1310 nm	1310 nm	1310 nm	1310 nm	1550 nm	1550 nm	TX 1310 nm, RX 1550 nm	TX 1550 nm, RX 1310 nm	TX 1310 nm, RX 1550 nm	TX 1550 nm, RX 1310 nm	TX 1310 nm, RX 1550 nm	TX 1550 nm, RX 1310 nm
Max. TX	-4 dBm	-1 dBm	-3 dBm	-2 dBm	1 dBm	5 dBm	5 dBm	-3 dBm		-2 dBm		2 dBm	
Min. TX	-9.5 dBm	-9 dBm	-9.5 dBm	-8 dBm	-4 dBm	0 dBm	0 dBm	-9 dBm		-8 dBm		-3 dBm	
RX Sensitivity	-18 dBm	-19 dBm	-20 dBm	-23 dBm	-24 dBm	-24 dBm	-30 dBm	-21 dBm		-23 dBm		-23 dBm	
Link Budget	8.5 dB	10 dB	10.5 dB	15 dB	20 dB	24 dB	30 dB	12 dB		15 dB		20 dB	
Typical Distance	550 m ^a	2 km ^b	10 km ^c	30 km ^c	40 km ^c	80 km ^c	110 km ^c	10 km ^c		20 km ^c		40 km ^c	
Saturation	0 dBm	-3 dBm	-3 dBm	-3 dBm	-3 dBm	-3 dBm	-3 dBm	-1 dBm		-1 dBm		-1 dBm	

a. 50/125 μm, 400 MHz * km or 62.5/125 μm, 500 MHz * km @ 850 nm multi-mode fiber optic cable

b. 62.5/125 μm, 750 MHz * km @ 1310 nm multi-mode fiber optic cable

c. 9/125 μm single-mode fiber optic cable

Environmental Limits

Operating Temperature:

Standard Models: 0 to 60°C (32 to 140°F)

Wide Operating Temp. Models: -40 to 85°C (-40 to 185°F)

Storage Temperature: -40 to 85°C (-40 to 185°F)

Ambient Relative Humidity: 5 to 95% (non-condensing)

Regulatory Approvals


Safety: UL, TÜV

Warranty

Warranty Period: 3 years

Details: See www.moxa.com/warranty

Dimensions (unit = mm)

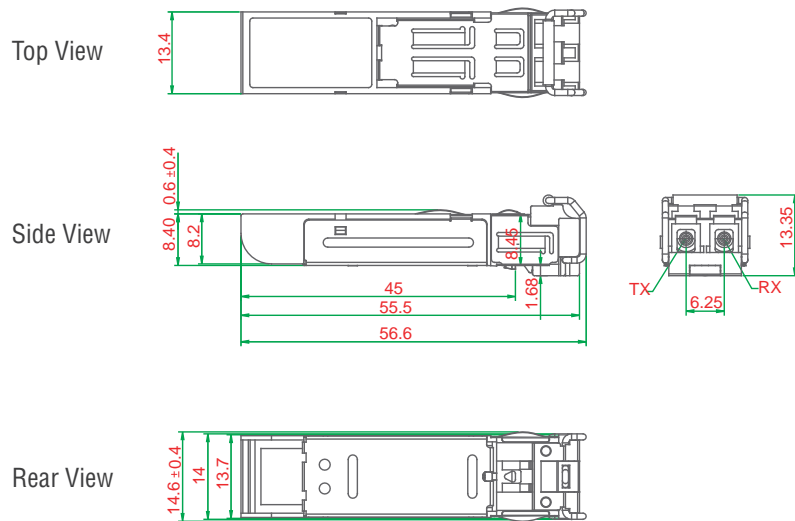

: Ordering Information

SFP Modules

Available Models		Port Interface						
Standard Temperature (0 to 60°C)	Wide Temperature (-40 to 85°C)	1000BaseSX, LC Connector, 0.5 km	1000BaseLSX, LC Connector, 2 km	1000BaseLX, LC Connector, 10 km	1000BaseLH, LC Connector, 30 km	1000BaseLHX, LC Connector, 40 km	1000BaseZX, LC Connector, 80 km	1000BaseZX, LC Connector, 110 km
SFP-1GSXLC	SFP-1GSXLC-T*	1	---	---	---	---	---	---
SFP-1GLSXLC	SFP-1GLSXLC-T	---	1	---	---	---	---	---
SFP-1GLXLC	SFP-1GLXLC-T	---	---	1	---	---	---	---
SFP-1GLHLC	SFP-1GLHLC-T	---	---	---	1	---	---	---
SFP-1GLHXL	SFP-1GLHXL-T	---	---	---	---	1	---	---
SFP-1GZXLC	SFP-1GZXLC-T	---	---	---	---	---	1	---
SFP-1GEZXL	---	---	---	---	---	---	---	1

Note: SFP-1GSXLC-T: -20 to 75°C operating temperature

WDM-type (BiDi) SFP Modules

Available Models		Port Interface					
Standard Temperature (0 to 60°C)	Wide Temperature (-40 to 85°C)	1000BaseSFP, LC Connector, 10 km		1000BaseSFP, LC Connector, 20 km		1000BaseSFP, LC Connector, 40 km	
		TX 1310 nm, RX 1550 nm	TX 1550 nm, RX 1310 nm	TX 1310 nm, RX 1550 nm	TX 1550 nm, RX 1310 nm	TX 1310 nm, RX 1550 nm	TX 1550 nm, RX 1310 nm
SFP-1G10ALC	SFP-1G10ALC-T	1	---	---	---	---	---
SFP-1G10BLC	SFP-1G10BLC-T	---	1	---	---	---	---
SFP-1G20ALC	SFP-1G20ALC-T	---	---	1	---	---	---
SFP-1G20BLC	SFP-1G20BLC-T	---	---	---	1	---	---
SFP-1G40ALC	SFP-1G40ALC-T	---	---	---	---	1	---
SFP-1G40BLC	SFP-1G40BLC-T	---	---	---	---	---	1

The SFP-1G series modules can be used with the following products

- EDS-728/828 series: IM-2GSFP series Gigabit Ethernet interface modules
- EDS-G509 series: 9G-port full Gigabit managed Ethernet switches
- EDS-518A series: 16+2G-port Gigabit managed Ethernet switches
- EDS-510A series: 7+3G-port Gigabit managed Ethernet switches
- EDS-P510 series: 7+3G-port Gigabit PoE managed Ethernet switches
- PT and IKS series: PM-7200-2G/4G series Gigabit Ethernet interface modules
- EDS-G308 series: 8G-port full Gigabit unmanaged Ethernet switches
- IMC-101G series: Industrial Gigabit media converters