

Moxa EtherDevice Switch

EDS-305-M12

Layer 2 M12/IP67 unmanaged Ethernet switches

Hardware Installation Guide

Fourth Edition, September 2009



© 2009 Moxa Inc. All rights reserved.
Reproduction without permission is prohibited.

P/N: 1802003050012

Overview

The Moxa EtherDevice™ EDS-305-M12 series of 5-port smart Ethernet switches provides a hardened and cost-effective solution for your Ethernet connections. The EDS-305-M12 switches are IP67-rated to provide protection against shock and foreign particles. IP67-rated products have the following characteristics: (1) dust proof, (2) protection against the effects of temporary immersion in water.

The EDS-305-M12 switches have a wide operating temperature range of -40 to 75°C, and are designed to withstand a high degree of vibration and shock. The rugged hardware design makes the EDS-305-M12 switches perfect for ensuring that your Ethernet equipment can withstand the rigors associated with critical industrial applications. The switches are rated for use in hazardous locations (Class 1 Division 2/Zone 2), and comply with CE/FCC, UL, DNV/GL/ABS/LR/NKK (maritime), and EN50155/50121-4 (railway applications) standards.

Package Checklist

Your EDS-305-M12 is shipped with the following items. If any of these items is missing or damaged, please contact your customer service representative for assistance.

- Moxa EtherDevice™ Switch.
- Hardware Installation Guide.
- Product Warranty Statement.
- 3 protective caps for unused ports and 8 port labels.
- Panel Mounting Kit.

Features

High Performance Network Switching Technology

- 5 10/100BaseT(X) ports (4-pin shielded M12 socket with D coding).
- Broadcast storm protection.
- IEEE802.3/802.3u/802.3x.
- Store and Forward switching process type.
- 10/100M, Full/Half-Duplex, MDI/MDIX auto-sensing.

Industrial Grade Reliability


- Active circuit protection.
- Robust connection.
- Dust and immersion proof.

Rugged Design

- Casing design meets IP67 protection standards.
- M12 connectors for robust connections.
- Operating temperature range of 0 to 60°C, or extended operating temperature range of -40 to 75°C.

EDS-305-M12 Panel Layouts



Front Panel View

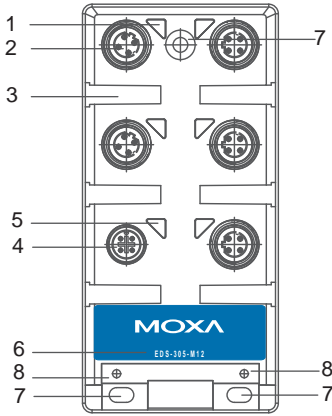


1. M12 port's 10/100 Mbps LED.
2. 10/100BaseT(X) port (4-pin female shielded M12 socket with D coding).
3. Port Label.
4. Power input (5-pin male shielded M12 socket with A coding).
5. Power input (PWR) LED.
6. Model name.
7. Holes for attaching the EDS-305-M12 to a wall with screws (there are 3 holes: bottom left, bottom right, and top middle).
8. Grounding screws.

Mounting Dimensions (unit = mm)


Top View

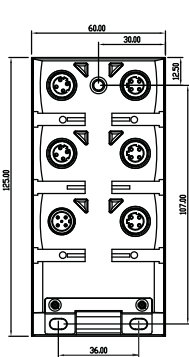


Front View



Side View



DIN-Rail Mounting Kit



Panel/Wall Mounting

To mount the EDS-305-M12 on the wall use the 3 screws included in the panel mounting kit.

STEP 1: Make 3 screw holes on the wall based on the positions of the 3 screw holes on the switch shown in the mounting dimensions diagram.

STEP 2: Insert one screw in the top-middle screw hole on the switch and screw it into the wall.

STEP 3: Screw in the remaining 2 screws through the bottom-left and bottom-right holes on the switch.

DIN-Rail Mounting (optional)

Use the optional DIN-Rail mounting kit (DK-M12-305, must be purchased separately) to mount the EDS-305-M12 on a 35-mm DIN rail.

STEP 1:



Fix the DIN-Rail attachment plate to the rear panel of the switch as shown in the above figure.

STEP 2:

Position the top hook of the DIN-Rail attachment plate to the top edge of the rail.

STEP 3:

Rotate the switch downwards until the bottom of the attachment plate latches onto the bottom edge of the rail.

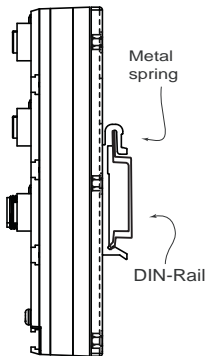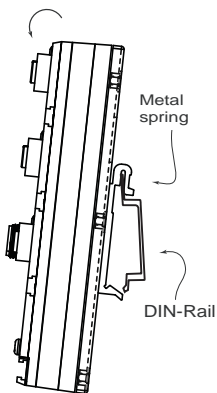

To remove the switch from the DIN-Rail, simply reverse Steps 2 and 3 above.

Wiring Requirements



WARNING

Turn the power off before disconnecting modules or wires. The correct power supply voltage is listed on the product label. Check the voltage of your power source to make sure that you are using the correct voltage. Do NOT use a voltage greater than what is specified on the product label.

These devices must be supplied by a SELV source as defined in the Low Voltage Directive 2006/95/EC and 2004/108/EC.



ATTENTION

Safety First!

Be sure to disconnect the power cord before installing and/or wiring your Moxa switch.

This device has UL508 approval. Use copper conductors only, 60/75°C, Tighten To 4.5 pound-inches. For use in Pollution Degree 2 Environment.



ATTENTION

Safety First!


Calculate the maximum possible current in each power wire and common wire. Observe all electrical codes dictating the maximum current allowable for each wire size. If the current goes above the maximum ratings, the wiring could overheat, causing serious damage to your equipment.

You should also heed the following guidelines:

- Use separate paths to route wiring for power and devices. If power wiring and device wiring paths must cross, make sure the wires are perpendicular at the intersection point.
NOTE: Do not run signal or communications wiring and power wiring in the same wire conduit. To avoid interference, wires with different signal characteristics should be routed separately.
- You can use the type of signal transmitted through a wire to determine which wires should be kept separate. The rule of thumb is that wiring that shares similar electrical characteristics can be bundled together.
- Keep input wiring and output wiring separated.
- It is strongly advised that you label wiring to all devices in the system when necessary.

Grounding the EDS-305-M12

Grounding and wire routing help limit the effects of noise due to electromagnetic interference (EMI). Run the ground connection from the ground screw to the grounding surface prior to connecting devices.

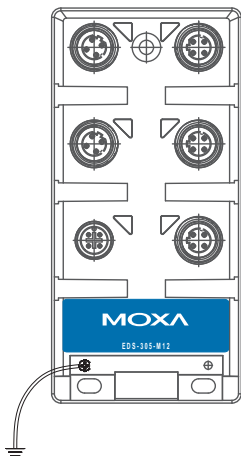

ATTENTION

This product is intended to be mounted to a well-grounded mounting surface such as a metal panel.

10/100BaseT(X) Ethernet Port Connection

All EDS-305-M12 models have 5 10/100BaseT(X) Ethernet ports (4-pin shielded M12 socket with D coding). The 10/100TX ports located on the EDS-305-M12's front panel are used to connect to Ethernet-enabled devices. Most users configure these ports for Auto MDI/MDI-X mode, in which case the port's pinouts are adjusted automatically depending on the type of Ethernet cable used (straight-through or cross-over), and the type of device (NIC-type or HUB/Switch-type) connected to the port.

In what follows, we give pinouts for both MDI (NIC-type) ports and MDI-X (HUB/Switch-type) ports. We also give cable wiring diagrams for straight-through and cross-over Ethernet cables.

Pinouts for sockets on EDS-305-M12

TP Port



- Pin 1: TD +
- Pin 2: RD +
- Pin 3: TD -
- Pin 4: RD -


Power input



- Pin 1: Input V+
- Pin 2: Not assigned
- Pin 3: Input V-
- Pin 4: Not assigned
- Pin 5: Function ground

Pinouts for RJ45 (8-pin)

RJ45 (8-Pin)



MDI Port Pinouts

Pin	Signal
1	Tx +
2	Tx -
3	Rx +
6	Rx -


MDI-X Port Pinouts

Pin	Signal
1	Rx +
2	Rx -
3	Tx +
6	Tx -

M12 (4-pin, M) to M12 (4-pin, M) Cross-Over Cable Wiring




Cross-Over Cable Wiring

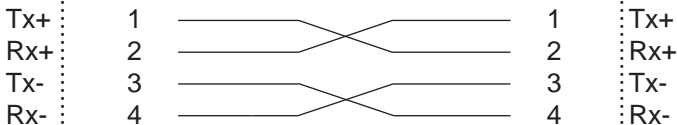

M12 (4-pin, M) to M12 (4-pin, M) Straight-Trough Cable Wiring




Straight-through Cable Wiring

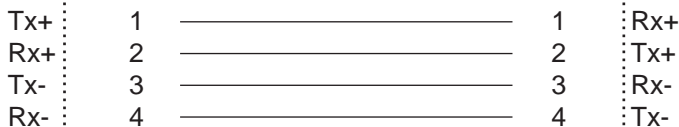

M12 (4-pin, M) to RJ45 (8-pin) Cross-Over Cable Wiring




Cross-Over Cable Wiring

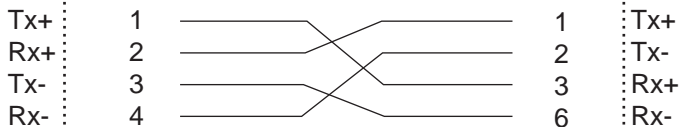

M12 (4-pin, M) to RJ45 (8-pin) Straight-Trough Cable Wiring



Straight-through Cable Wiring

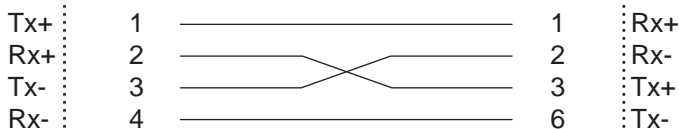

Auto MDI/MDI-X Connection

The Auto MDI/MDI-X function allows users to connect EDS-305-M12's 10/100BaseTX ports to any kind of Ethernet device, without needing to pay attention to the type of Ethernet cable being used for the connection. This means that you can use either a straight-through cable or cross-over cable to connect the EDS-305-M12 to Ethernet devices.

Dual Speed Functionality & Switching

The EDS-305-M12's 10/100 Mbps switched M12 ports auto negotiate with the connected device to use the fastest data transmission rate supported by both devices. All of Moxa's EtherDevice switches are plug-and-play devices, so that software configuration is not required. The half/full duplex mode for the switched M12 ports is user dependent and changes (by auto-negotiation) to full or half duplex, depending on which transmission speed is supported by the attached device.

Switching and Address Learning

The EDS-305-M12 has an address table that can hold up to 1000 node addresses, which makes it suitable for use with large networks. The address tables are self-learning, so that as nodes are added or removed, or moved from one segment to another, the EDS-305-M12 automatically keeps up with new node locations. An address-aging algorithm causes the least-used addresses to be deleted in favor of newer, more frequently used addresses. To reset the address buffer, power down the unit and then power it back up.

Switching, Filtering, and Forwarding

Each time a packet arrives at one of the switched ports, a decision is made to filter or forward the packet. Packets with source and destination addresses belonging to the same port segment will be filtered, constraining those packets to one port, and relieving the rest of the network from the need to process them. A packet with destination address on another port segment will be forwarded to the appropriate port, and will not be sent to the other ports where it is not needed. Packets that are used in maintaining the operation of the network (such as the occasional multi-cast packet) are forwarded to all ports.

The EDS-305-M12 operates in the store-and-forward switching mode, which eliminates bad packets and enables peak performance to be achieved when there is heavy traffic on the network.

LED Indicators

Several LED indicators are located on the EDS-305-M12's front panel. The function of each LED is described in the table below.

LED	Color	State	Description
PWR	AMBER	On	Power is being supplied to the power input.
		Off	Power is not being supplied to the power input.
LNK/ACT (10M)	AMBER	On	TP port's 10 Mbps link is active.
		Blinking	Data is being transmitted at 10 Mbps
		Off	TP port's 10 Mbps link is inactive.
LNK/ACT (100M)	GREEN	On	TP port's 100 Mbps link is active
		Blinking	Data is being transmitted at 100 Mbps.
		Off	TP port's 100 Mbps link is inactive.

Auto-Negotiation and Speed Sensing

All of the EDS-305-M12's Ethernet ports independently support auto-negotiation for speeds in the 10BaseT and 100BaseTX modes, with operation according to the IEEE 802.3u standard. This means that some nodes could be operating at 10 Mbps, while at the same time, other nodes are operating at 100 Mbps.

Auto-negotiation takes place when an M12 cable connection is made, and then each time a LINK is enabled. The EDS-305-M12 advertises its capability for using either 10 Mbps or 100 Mbps transmission speeds, with the device at the other end of the cable expected to advertise in the same way. Depending on what type of device is connected, this will result in agreement to operate at a speed of either 10 Mbps or 100 Mbps.

If an EDS-305-M12's Ethernet port is connected to a non-negotiating device, it will default to 10 Mbps speed and half-duplex mode, as required by the IEEE 802.3u standard.

Specifications

Technology

Standards IEEE 802.3, 802.3u, 802.3x

Processing Type Store and Forward, with IEEE802.3x full duplex, back pressure flow control

Interface

M12 Ports 10/100BaseTX auto negotiation speed, F/H duplex mode, and auto MDI/MDI-X connection

LED Indicators Power, LNK/ACT

Power

Input Voltage 12 to 45 VDC or 18 to 30 VAC (47 to 63 Hz)

Input Current 0.12A @ 24 VDC
0.28A @ 24 VAC

Connection M12 A-coding 5-pin male connector, single power input

Protection

Overload current protection / Limited current 1.1A

Reverse polarity protection present

Mechanical

Casing IP67 protection, plastic case

Dimensions (W x H x D) 60 x 125 x 29.6 mm (2.4 x 4.9 x 1.2 in)

Weight 250g

Installation Panel mounting, DIN-Rail mounting (with optional kit)

Environment

Operating Temperature 0 to 60°C for standard model,
-40 to 75°C for -T models

Storage Temperature -40 to 85°C

Operating relative humidity 5 to 95% (non-condensing)

Regulatory Approvals

Safety UL 508

Hazardous Location UL/cUL Class1, Div.2, ATEX Class1, Zone2 (pending)

Rail Traffic EN 50155, EN 50121-4 (pending)

Maritime DNV, GL, ABS, LR, NKK (pending)
EMI: FCC Part 15, CISPR (EN55022) class A
EMS: EN61000-4-2 (ESD), level 3
EN61000-4-3 (RS), level 3
EN61000-4-4 (EFT), level 3
EN61000-4-5 (Surge), level 3
EN61000-4-6 (CS), level 2
Shock: IEC60068-2-27
Free Fall: IEC60068-2-32
Vibration: IEC60068-2-6

Note: Please check Moxa's website for the most up-to-date certification status.

MTBF (meantime between failures)

Time 636,000 hrs

Database Telcordia (Bellcore), GB 25°C

WARRANTY 5 years

Technical Support Contact Information

www.moxa.com/support

Moxa Americas:

Toll-free: 1-888-669-2872

Tel: +1-714-528-6777

Fax: +1-714-528-6778

Moxa China (Shanghai office):

Toll-free: 800-820-5036

Tel: +86-21-5258-9955

Fax: +86-10-6872-3958

Moxa Europe:

Tel: +49-89-3 70 03 99-0

Fax: +49-89-3 70 03 99-99

Moxa Asia-Pacific:

Tel: +886-2-8919-1230

Fax: +886-2-8919-1231