TM100

The TM100 features an ACP-enabled ThinManager® BIOS, providing a versatile and highly reliable fanless thin client virtualization solution.

logicsupply.com/tm100 ❯

Mighty Efficient

Don't compromise processing power for energy efficiency. Requiring as little as 7.5 W, the TM100 lets you do more with less.

No Vents, No Fans, No Worries

Your application demands more than a plastic case. The TM100's high-performance fanless and ventless aluminum chassis keeps components cool while keeping dust out.

Built for a Connected World

Engineered for demanding commercial use, the I/O on the TM100 lets you connect the devices and peripherals you need. The TM100 features an HDMI dual independent display.

US Office
Phone: +1 802 861 2300
Email: info@logicsupply.com
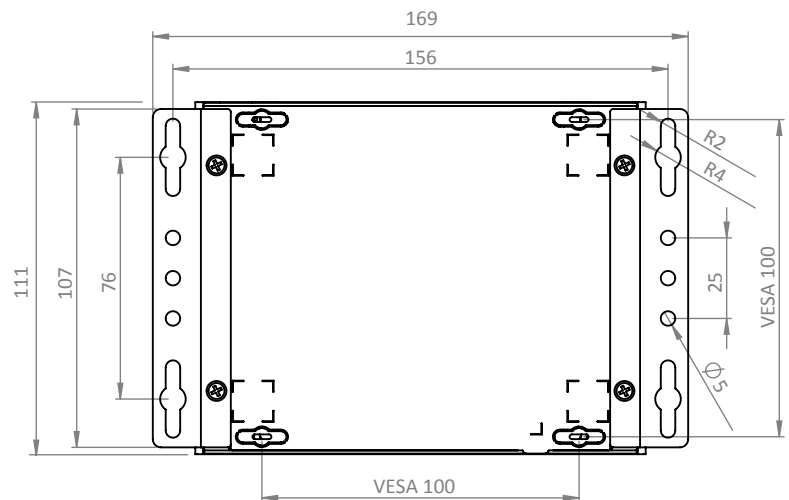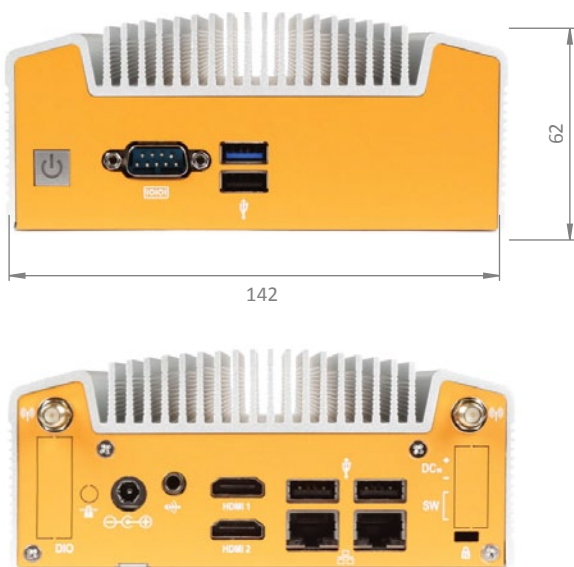www.logicsupply.com

EU Office
Phone: +31 85 2733760
Email: info@logicsupply.eu
www.logicsupply.eu

Specifications

Front I/O	Power button 1 USB 2.0 port 1 RS422/RS485/RS232 COM port
Rear I/O	2 USB 2.0 ports 2 Gb LAN ports 1 Line-out connector 2 HDMI ports 1 DC-Jack Phoenix Power Connector (optional)
Processor	1.83 GHz Intel Celeron N2930
Processor Socket	Onboard (BGA)
Processor Generation	Bay Trail
Processor Cores	4
Graphics/GPU	Intel HD Graphics
Memory Type	DDR3L SO-DIMM (non-ECC)
Memory Capacity	8 GB
Memory Speed	1333 MHz
Memory Slot	1

Expansion Type	PCIe Mini Card (half-height)
Storage Options	mSATA
LAN Controller	Intel WG82574L GbE
Audio Controller	Realtek ALC887 Audio Codec
64-bit	Yes
System Monitoring	Watchdog Timer
Input Voltage	9 ~ 24 V
Power Input	Onboard DC jack
Operating Temperature	0°C ~ 50°C
Dimensions (mm)	142 W x 62 H x 111 D
Case Type	Compact Fanless
Case Material	Steel With Aluminum Extrusion
Port Punchouts	2x Antenna Holes
Mounting	VESA MIS-D 100, Wall-mount, DIN
Included Accessories	AC Adapter, Locking Power Adapter
Warranty	1 year warranty on parts and services
Certifications	CE, FCC, RoHS

Dimensional Drawings

All dimensions in mm

logicsupply.com/tm100