

FlexEdge™

DA 4UI / 2 UI MIX I/O Modules



▲ FLEXEDGE™ Intelligent Edge Automation Platform

ONE PLATFORM. MILLIONS OF CONFIGURATIONS. LIMITLESS POTENTIAL.

- ▲ Two models offering mix of inputs and outputs
4UI MIX - 4 Univ. Inputs, 3 DI/DO, 2 AO
2UI MIX - 2 Univ. Inputs, 8 DI/DO, 2 AO
- ▲ Universal Inputs accept TC, RTD, 0-10 V and 0/4-20 mA signals
- ▲ Digital Inputs and outputs (software selectable)
- ▲ Analog Outputs capable of multiple ranges
- ▲ Configured using Crimson® software (version 3.2 or later)



▲ Ordering Guide

MAIN UNIT

PART NUMBER	DESCRIPTION
DAM00I0IN4DA0000	DA Series I/O Mix Module with 4UI
DAM00I0IN2DA0000	DA Series I/O Mix Module with 2UI

▲ DA 4UI / 2UI MIX I/O Modules Specifications

▲ Specifications

Power Requirements

Power is supplied by the DA host device.

4UI MIX Max Power: 2.7 W

2UI MIX Max Power: 2.6 W

Memory

Non-volatile memory retains all programmable parameters. The Controller also stores the parameters in order to reprogram any modules that need updates.

LEDs

Model dependent

STS - A status LED to show general module status

One alarm LED for each universal input channel

One LED indicator for each Digital I/O point

UI - Universal Inputs

GENERAL:

Sample Time: 50 msec nominal; software configurable from 4 msec to 1200 msec

Common Mode Rejection: >110 dB, 50/60 Hz

Normal Mode Rejection: >50 dB, 50/60 Hz

Temperature Coefficient: 0.01%/°C

Step Response Time: 100 msec typ., 200 msec max

THERMOCOUPLE INPUT:

Types: T, E, J, K, R, S, B, N, C

Slope & Offset: Provides sensor error correction

Input Impedance: 20 M ohm

Lead Resistance Effect: 0.25 μ V/ohm

Cold Junction Compensation: Less than ± 1 °C typical (± 1.5 °C max) over -40 to 75 °C ambient temperature

Resolution: 0.1°

Temperature Indication Accuracy: \pm (0.3% of span, +1 °C).

Includes NIST conformity, cold junction effect, A/D conversion errors, temperature coefficient and linearization conformity at 23 °C after 20 minute warm up.

Probe Break Response: Upscale drive, Input Fault Alarm bit set high, ALM LED illuminates.

RTD INPUT:

Type: 2 or 3 wire

Excitation: 150 μ A

Lead Resistance: 15 ohms Max

Resolution: 1 or 0.1°

Slope & Offset: Provides sensor error correction

Temperature Indication Accuracy: Includes NIST conformity, A/D conversion errors, temperature coefficient and linearization conformity at 23 °C after 20 minute warm up.

Probe Break Response: If channel is enabled: upscale drive, Input

Fault Alarm bit set high, ALM LED illuminates

CURRENT INPUT:

Ranges: 0-20 mA or 4-20 mA

Programmable Scaling: $\pm 30,000$

Input Impedance: 10 Ohm

Max. Continuous Overload: 100 mA

Accuracy: $\pm 0.1\%$ of span

Input Fault Response: Upscale Drive, Input Fault Alarm bit set

high, ALM LED illuminates below -2 mA, and above 22 mA for 0-20 mA range; below +2 mA and above 22 mA for 4-20 mA signals.

VOLTAGE INPUT:

Ranges: 0-10 VDC

Programmable Scaling: $\pm 30,000$

Input Impedance: 1 M Ohm

Max. Continuous Overload: 50 V

Accuracy: $\pm 0.1\%$ of span

Input Fault Response: Upscale Drive, Input Fault Alarm bit set high, ALM LED illuminates below -0.5 and above +10.5 VDC.

DI - DIGITAL INPUTS:

8 or 3 channels (model dependent)

Maximum Input Voltage: 30 VDC, reverse polarity protected

Guaranteed ON Voltage: 3.8 V

Guaranteed OFF Voltage: 1.2 V

Sourcing Impedance: 10K Ohm

Sinking Impedance: 20K Ohm

Selectable Hardware Filter: 50 Hz or 500 Hz

DO - DIGITAL OUTPUTS:

8 or 3 (model dependent) solid state N-channel open drain MOSFETs

Rating: 1 ADC max

V_{DS} ON: < 0.2 V @ 1 A

V_{DS} MAX: 30 VDC

Offstate Leakage Current: 0.5 μ A max

Isolation Level: 500 Vrms @ 50/60 Hz for 1 minute

AO - ANALOG OUTPUTS

Two (2) independently configured. The outputs are not isolated from each other, but are isolated from the power supply and all other I/O.

Software programmable for 0-5 VDC, -10 VDC to 10 VDC, 0-20 mA, and 4-20 mA

Effective Resolution: Full 16-bit (Signed)

Voltage: 500 μ V

Current: 1 μ A

Accuracy: 0.2% of full scale (-40 to 70 °C)

Isolation Level: 500 Vrms @ 50/60 Hz for 1 minute

Communications

Provided by the DA70 Controller

Environmental

Operating Temperature Range: -40 to 75 °C

Storage Temperature Range: -40 to 85 °C

Operating and Storage Humidity: 0 to 85% max. RH noncondensing

Vibration to IEC 60068-2-6: Operational 5-500 Hz, 2 g

Shock to IEC 60068-2-27: Operational 15 g

Altitude: Up to 2000 meters

Installation Category II, Pollution Degree 2 as defined in IEC/EN 60664-1.

Certification & Compliance

CE Approved

EN 61326-1 Immunity to Industrial Locations

Emission CISPR 11 Class A

IEC/EN 61010-1

▲ DA 4UI / 2UI MIX I/O Modules Specifications Cont. and Dimensions

RoHS Compliant
ATEX Approved
Ⓜ II 3 G Ex ec IIC T4 Gc
DEMKO 20 ATEX 2268X
IECEX Approved
IECEX UL 20.0007X
UL Hazardous: File # E317425
Rugged IP30 enclosure

Connections

Wire Strip Length: 0.3" (7.5 mm)
Wire Gauge Capacity: 14 to 24 AWG (2.08 to 0.20 mm²) copper wire only

Construction

Plastic enclosure with IP30 rating.

Weight:

4UI Mix - 11.5 oz (326 g)

2UI Mix - 11.3 oz (320 g)

Mounting

DIN Rail: Attaches to standard "T" profile DIN rail according to EN50022 - 35 x 7.5 and 35 x 15


Warranty

3 years on design and manufacturing defects.

Specifications are subject to change.

Visit www.redlion.net for more information.

▲ Dimensions In inches (mm)

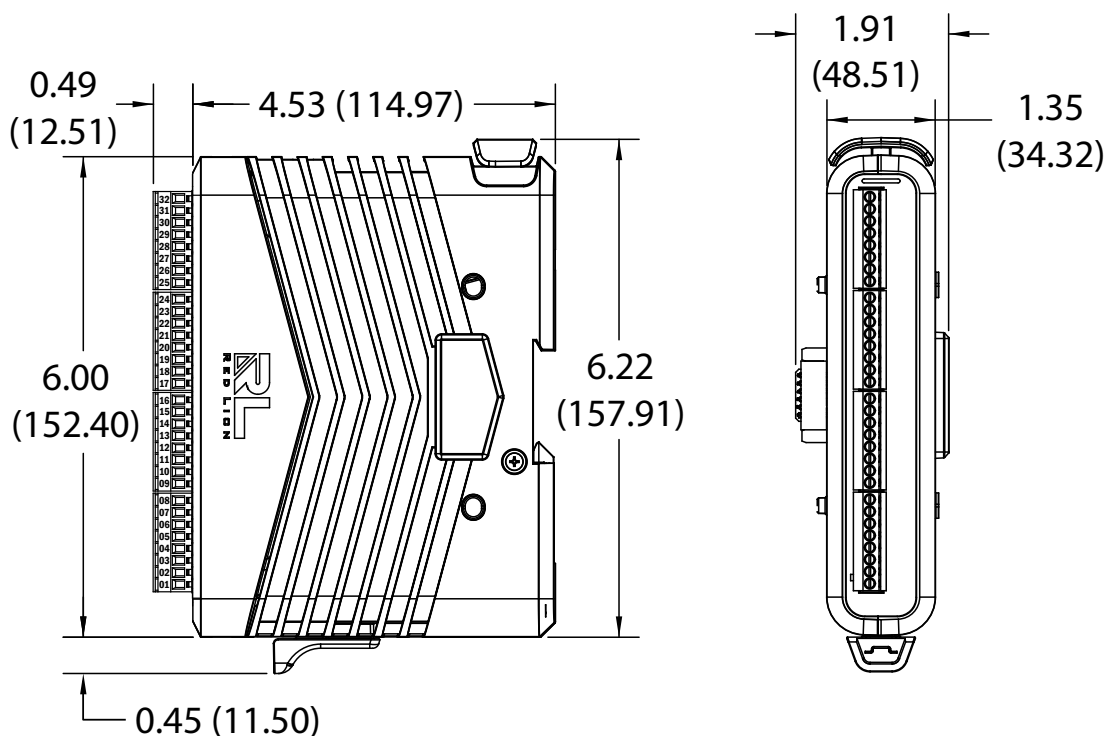

Red Lion has been delivering innovative solutions to global markets since 1972 through communication, monitoring and control for industrial automation and networking - enabling companies worldwide to gain real-time data visibility that drives productivity. Red Lion is part of Spectris plc, the productivity enhancing instrumentation and controls company.

© 2020 Red Lion Controls, Inc. All rights reserved. Red Lion and the Red Lion logo, are registered trademarks of Red Lion Controls, Inc. All other company and product names are trademarks of their respective owners.

www.redlion.net
[contact us](#)