

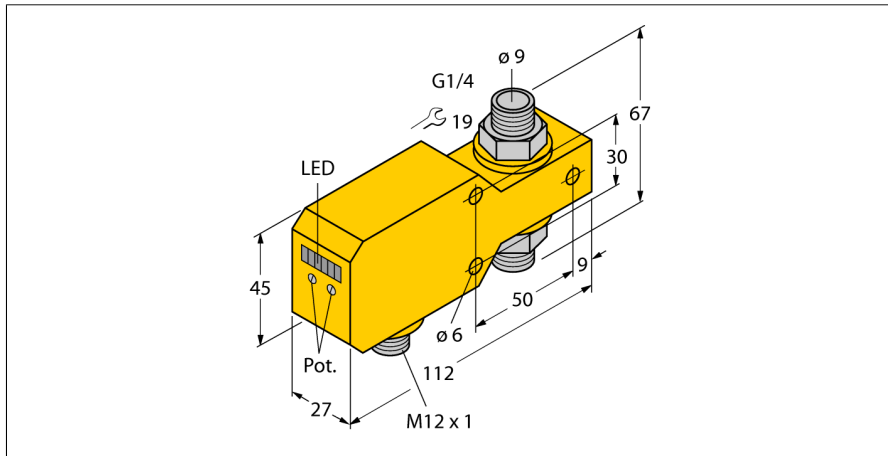


Flow monitoring
Inline sensor with integrated processor
FCI-D10A4P-LIX-H1141



- Flow sensor for liquid media
- Calorimetric principle
- Adjustment via potentiometer
- LED band
- Operating range 0.1...6 l/min
- DC 3-wire, 21.6...26.4 VDC
- 4...20 mA analog output
- Connector device, M12 × 1

Wiring Diagram



Type designation	FCI-D10A4P-LIX-H1141
Ident-No.	6870643
Mounting conditions	Inline sensor
Operating voltage	21.6...26.4 VDC
Short-circuit protection	yes
Current output	4...20 mA
Housing material	Plastic, PBT
Max. tightening torque housing nut	30 Nm
Electrical connection	Connectors, M12 × 1
Protection class	IP67
Packaging unit	1

Functional principle

The function of the inline flow sensors is based on the thermo-dynamic principle. Heat is generated in a measuring tube and absorbed by the flowing medium. The transported heat loss is thus a measure of the flow speed. Thus TURCK's wear-free flow sensors reliably monitor the flow of gaseous and liquid media. A low pressure drop and fast response to flow rate variations are the outstanding features of these devices.

