


# FCI-TCD04A4P-LIX-H1141



## Flow Monitoring – Inline Sensor with Integrated Processor

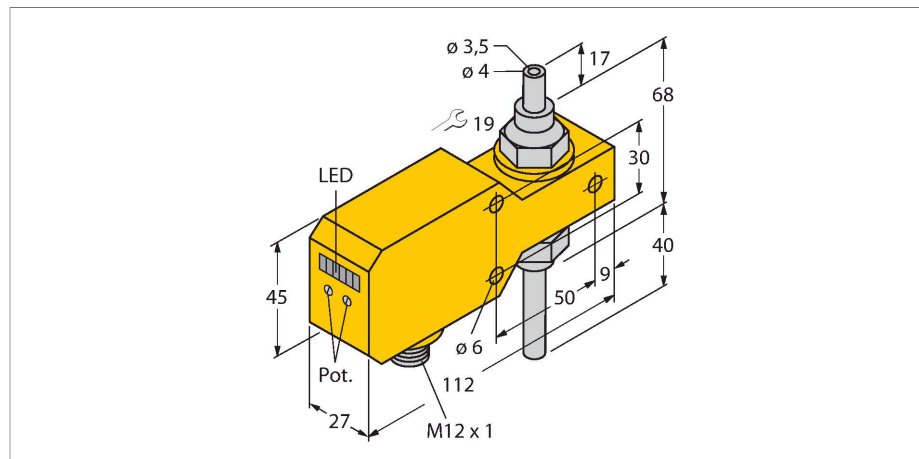

### Features

- Flow sensor for liquid media
- Calorimetric principle
- Adjustment via potentiometer
- LED band
- Operating range 1...200 ml/min
- Mechanical Connection: Barrel, 4 mm
- DC 3-wire, 21.6...26.4 VDC
- 4...20 mA analog output
- Connector device, M12 x 1

### Wiring diagram




### Technical data

Ident. no.	6870655
Type	FCI-TCD04A4P-LIX-H1141
<b>Mounting</b>	<b>Inline sensor</b>
Flow operating range	0,001...0,2 l/min
Stand-by time	5...20 s
Setting time	0.5...3 s
Temperature gradient	≤ 400 K/min
Medium temperature	0...+60 °C
Ambient temperature	0...+60 °C
<b>Operating voltage</b>	<b>21.6...26.4 VDC</b>
Current consumption	≤ 50 mA
Output function	Analog output
Short-circuit protection	yes
Reverse polarity protection	yes
Current output	4...20 mA
Load	200...500 Ω
Protection class	IP67
Design	Inline
<b>Housing material</b>	<b>Plastic, PBT</b>
Sensor material	Stainless steel, V4A (1.4571)
Electrical connection	Connector, M12 x 1
Process Pressure	1 bar
Process connection	Barrel 4 mm
Flow state display	LED chain, red (1x), green (5x)

### Functional principle

The function of the inline flow sensors is based on the thermo-dynamic principle. Heat is generated in a measuring tube and absorbed by the flowing medium. The transported heat loss is thus a measure of the flow speed. Thus TURCK's wear-free flow sensors reliably monitor the flow of gaseous and liquid media. A low pressure drop and fast response to flow rate variations are the outstanding features of these devices.

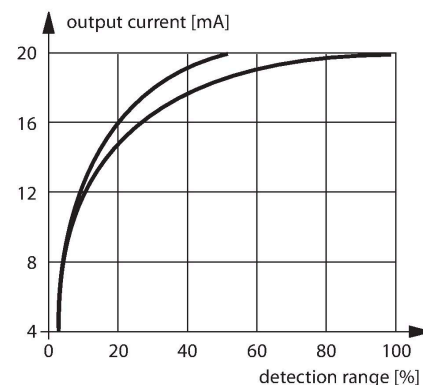

## Technical data

LED display

red = 4 mA  
1x green > 4 mA  
2x green > 8 mA  
3x green > 12 mA  
4x green > 16 mA  
5x green = 20 mA

---