


Flow monitoring



Immersion sensor with integrated processor

FCS-GL1/2A2P-LIX-H1141/A

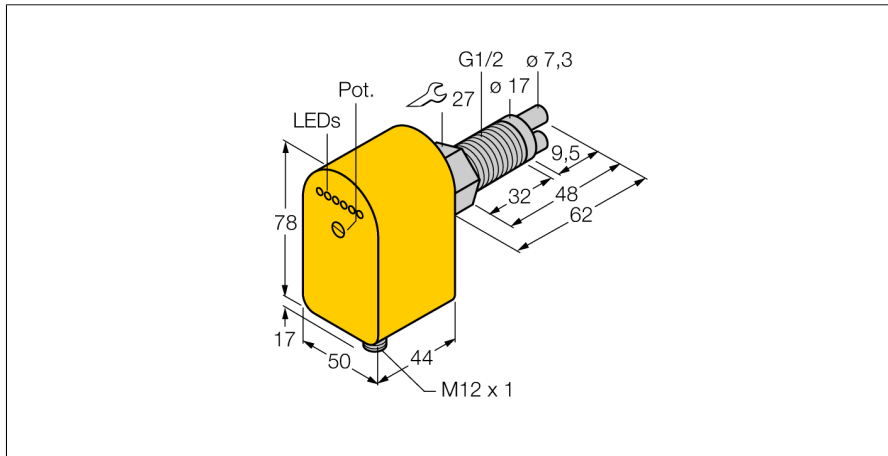


- Sensor for gaseous media
- Calorimetric principle
- Adjustments via potentiometer
- 3-wire DC, 21...26 VDC
- 4...20 mA analog output
- Plug-in device, M12 x 1

Wiring diagram



Functional principle

Our insertion - flow sensors operate on the principle of thermodynamics. The measuring probe is heated by several °C as against the flow medium. When fluid moves along the probe, the heat generated in the probe is dissipated. The resulting temperature is measured and compared to the medium temperature. The flow status of every medium can be derived from the evaluated temperature difference. Thus TURCK's wear-free flow sensors reliably monitor the flow of gaseous and liquid media.

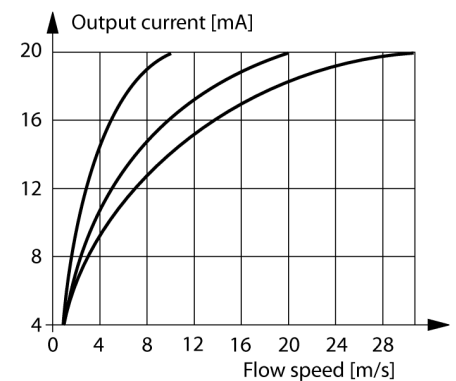

Type code	FCS-GL1/2A2P-LIX-H1141/A
Ident-No.	6870455
Ident-No (TUSA)	M6870455

Mounting	insertion style sensor
Air Operating Range	0.5...30 m/s
Stand-by time	20...90 s
Setting time	4...30 s
Temperature jump, response time	max. 100 s
Temperature gradient	≤ 20 K/min
Medium temperature	-20...80 °C

Operating voltage	21... 26VDC
Current consumption	≥ 80 mA
Output function	analog output
Short-circuit protection	yes
Reverse polarity protection	yes
Current output	4...20mA
Load	≤ 500 Ω
IP Rating	IP67

Housing material	plastic, PBT
Sensor material	stainless steel, AISI 303
Max. tightening torque housing nut	100 Nm
Connection	male, M12 x 1
Pressure resistance	30 bar
Process connection	G 1/2" long

Flow state display	LED chain, red (1x), green (5x)
LED display	red = 4 mA
	1x green > 4 mA
	2x green > 8 mA
	3x green > 12 mA
	4x green > 16 mA
	5x green = 20 mA