



Technical data

| | |
|----------------------|--|
| Vibration resistance | 55 Hz (1 mm) |
| Shock resistance | 30 g (11 ms) |
| Protection class | IP67 |
| MTTF | 2283 years acc. to SN 29500 (Ed. 99) 40 °C |
| Power-on indication | LED, Green |
| Switching state | LED, Yellow |

Mounting instructions

Mounting instructions/Description

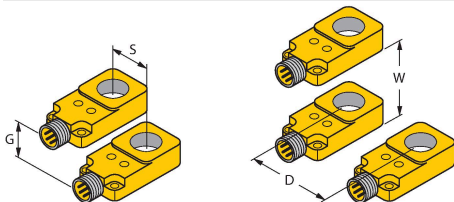

| | |
|------------|-------|
| Distance D | 45 mm |
| Distance W | 45 mm |
| Distance S | 14 mm |
| Distance G | 30 mm |

When mounting the sensor with an M12 connector, observe a low horizontal offset to the surface. This may vary depending on the choice of the connector.

Wiring accessories

| Dimension drawing | Type | Ident. no. | |
|-------------------|-------------|------------|--|
| | RKC4T-2/TEL | 6625010 | Connection cable, female M12, straight, 3-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com |

