


**Accessories**  
**Actuation kit (puck)**  
**BTS-DS20-TP1**

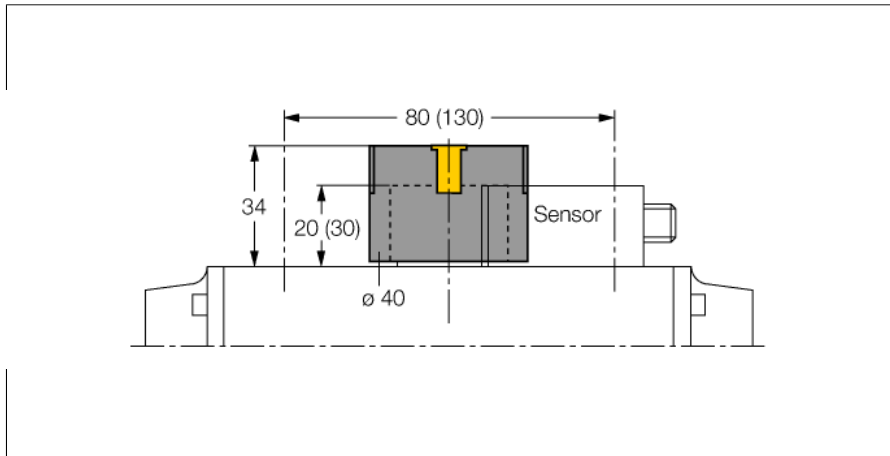

- End position damped
- For clockwise or counter-clockwise rotating drives
- Displays rotatable by 90 °
- Hole pattern on receptacle surface 30 x 80 mm (30 x 130 mm)
- Connection shaft (shaft extension) height: 20 mm/ $\varnothing$ : max. 30 mm

**General description**

Dual sensors are especially designed for position detection in rotary actuators. They combine the reliability of non-contact inductive sensors with the flexibility of a modular housing system. A broad range of practice-oriented accessories ensure optimal adaption to your system.

<b>Type designation</b>	BTS-DS20-TP1
Ident-No.	6900155
<b>Design</b>	Accessories for dual sensors, Ni4-DS20-...
Housing material	Plastic, PP-GF30
<b>Included in delivery</b>	2 M5 x 25 hex cap screws, 2 D5 lock washers, 1 countersunk screw M6 x 25

