


Accessories
Mounting Kit
BTS-DSU35-Z06

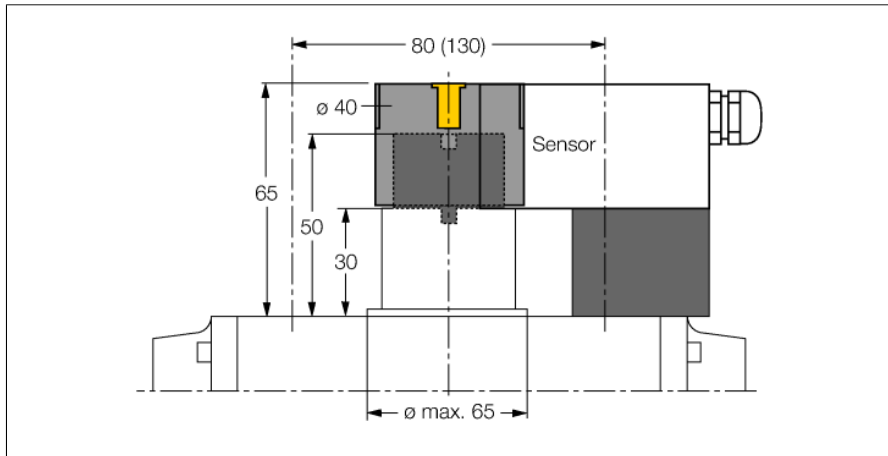

Mounting kit for larger rotary actuators:
Ø spacer plate and snap ring: max. 65 mm
Hole pattern on flange surface: 30 x 80 mm (30 x 130 mm)
Connection shaft (shaft extension) height: 30 mm/Ø: max. 40 mm
Included in delivery:
1 spacer plate Ø 30 mm (POM)
1 spacer ring Ø 20 mm (PP-GF30)
Mounting the spacer plate:
2 cylinder screws M5 x 45 [DIN 912-A2]
2 lock washers A5 [DIN 137-A2]
Mounting the puck with spacer ring:
1 countersunk screw M6 x 45 [DIN 7991-A2]
The spacer ring has a 4 x 4 mm cross-shaped notch allowing the actuator to be mounted offset by 90°, suited for cross-wise-mounted drives.

Type designation	BTS-DSU35-Z06
Ident-No.	6900402
Design	Accessories for dual sensors, Ni4-DSU35...
Housing material	Plastic

General description

Dual sensors are especially designed for position detection in rotary actuators. They combine the reliability of non-contact inductive sensors with the flexibility of a modular housing system. A broad range of practice-oriented accessories ensure optimal adaption to your system.

