

Industrial Ethernet 5-port Gigabit Switch

SDW-550-T5G

- ⌘ Easy to install and use
 - Purpose built DIN rail casing with integral clip
 - Gbit or FE auto-negotiation and polarity detection
 - Transparent to industrial Ethernet protocols
- ⌘ Designed for use in harsh industrial applications
 - Dual 9.6 – 57.6 VDC power input
 - Total galvanic isolation between each cable screen
 - IP21
- ⌘ Robust for long service life
 - 1.121.000 hours MTBF to MIL-HDBK-217K
 - –40 to +74 °C (–40 to +165 °F) with no moving parts
 - Industrial EMC, shock and vibration testing
- ⌘ Diagnostics and legacy connectivity
 - Port mirroring function
 - Diagnostic LEDs
 - DIP switches to lock port parameters for old equipment



EN 50121-4
Railway Trackside

EN 61000-6-1
Residential Immunity

EN 61000-6-2
Industrial Immunity

EN 61000-6-4
Industrial Emission

NEMA TS 2-2003
Traffic Controller Assemblies
with NTCIP Requirements

The SDW-550-T5G is an unmanaged 5 port switch with five copper ports, all supporting 10 Mbit/s, 100 Mbit/s or Gbit Ethernet. It is designed for easy use in heavy duty industrial, maritime and rail trackage applications. The unit supports 802.1Q long packets which allow all standard industrial Ethernet protocols to be used.

The SDW-550-T5G is designed for use in industrial applications with dual 9.6 to 57.6VDC power input. The unique “tri-galvanic” isolation provides isolation between all ports, power supply and between each chassis screen avoiding ground loop currents. The IP21 rating ensures that the unit can be installed in locations where condensed water may occur.

Only industrial grade components are used which gives the SDW-550-T5G an MTBF of 1.121.000 hours and ensures a long service life. A wide operating temperature range of –40 to +74 °C (–40 to +165 °F) can be achieved with no moving parts.

The SDW-550-T5G has been tested both by Westermo and external test houses to meet EMC, isolation, vibration and shock standards, all to the highest levels suitable for heavy industrial, trackage and maritime environments.


Network diagnostics are simplified with the inclusion of port mirroring on one port allowing data flow through the switch to be monitored using a network analyzer. All five ports can have data rate and flow control locked by DIP switch, which can eliminate problems with old legacy Ethernet equipment that is unable to support auto negotiation.

Ordering Information

Art.no	Description
3644-2001	SDW-550-T5G
3125-0001	PS-30, Power supply, DIN mounted (Accessories)

Specifications SDW-550-T5G

Dimensional drawing

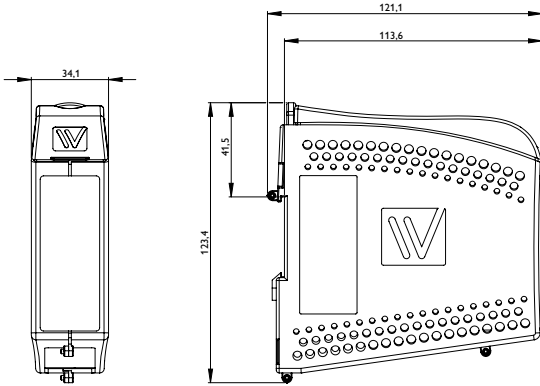

Dimension W x H x D 34 x 123 x 121 mm (1.33 x 4.84 x 4.76 in)

Weight 0.25 kg

Degree of protection IP21

Power

Operating voltage	9.6 – 57.6 VDC
Rated current	12 – 48 VDC; 260 – 65 mA

Interfaces

Ethernet TX	5 x RJ-45, 10 Mbit/s, 100 Mbit/s or 1 Gbit/s
-------------	--

Temperature

Operating	-40 to +74 °C (-40 to +165 °F)
Storage & Transport	-50 to +85 °C (-58 to +185 °F)

Agency approvals and standards compliance

EMC	EN 50121-4, Railway applications – Electromagnetic compatibility – Emission and immunity of the signalling and telecommunications apparatus
	EN 61000-6-1, Immunity residential environments
	EN 61000-6-2, Immunity industrial environments
	EN 61000-6-4, Emission industrial environments
Safety	EN/IEC/UL 60950-1, IT-equipment
Marine	DNV GL rules for classification – Ships and offshore units
Environmental	NEMA TS 2-2003