


Managed Device Server Switch

L-108-F2G-S2



- ⌘ Compact Device Server Switch for legacy application
 - Flexible SFP transceiver design
 - Advanced WeOS Layer 2 functionality
 - Low power consumption
- ⌘ Designed for use in industrial applications
 - Dual 19 – 60 VDC power input
 - Highly configurable fault I/O contact
 - Robust metal DIN rail housing
- ⌘ Robust for long service life
 - 517,000 hours MTBF to MIL-HDBK-217K
 - -40 to +70°C (-40 to +158°F) with no moving parts
- ⌘ Unique future proof industrial networking solutions
 - Legacy IP solutions
 - Network IP Security and remote access
 - Multiple network resilience solutions

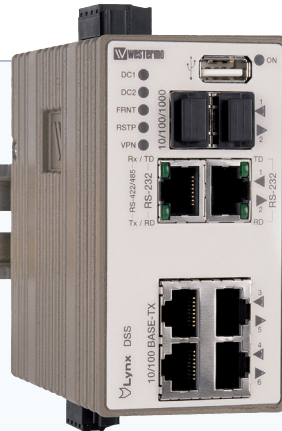

EN 61000-6-1
Residential Immunity

EN 61000-6-2
Industrial Immunity

EN 61000-6-3
Residential Emission

EN 61000-6-4
Industrial Emission

EN 50121-4
Railway Trackside

Lynx DSS is available in two versions, L108-F2G-S2 is a device server with a layer 2 industrial Ethernet switch, powered by the Westermo WeOS network operating system. Lynx DSS is the most compact and has the lowest power requirements in this class of device servers. Lynx DSS has 4 10/100 Mbit/s ports in addition to 2 ports which can be fitted with Gbit or 100 Mbit SFP transceivers. One of the two serial ports is configured for RS-232 the other one can be configured for RS-232 or RS-422/485.

Lynx DSS is designed for simple use in industrial applications, from the robust DIN rail clip solution to the configurable fault contact and the industrial level dual power inputs.

Only industrial grade components are used which gives the Lynx DSS an MTBF of 517,000 hours and ensures a long service life. A wide operating temperature range -40 to +70°C (-40 to +158°F) can be achieved with no moving parts or cooling holes in the case. Lynx DSS has been tested both by Westermo and external test houses to meet many EMC, isolation, vibration and shock standards, all to the highest levels suitable for heavy industrial environments and rail trackside application.


WeOS has been developed by Westermo to allow us to offer cross platform and future proof solutions. WeOS deliver unique functionality in legacy IP solutions, supporting Modbus Gateway, virtual COM, modem replacement or several options in dual TCP applications. For more WeOS functionality please see the WeOS datasheet.

Ordering Information

Art.no	Description
3643-0200	L108-F2G-S2, Managed Device Server Switch
1211-2027	CLI Cable (Console) (Accessories)
1211-2210	RJ-45 to DB9 cable (Accessories)
3125-0001	PS-30, Power supply, DIN mounted (Accessories)

Specifications L108-F2G-S2

Dimensional drawing

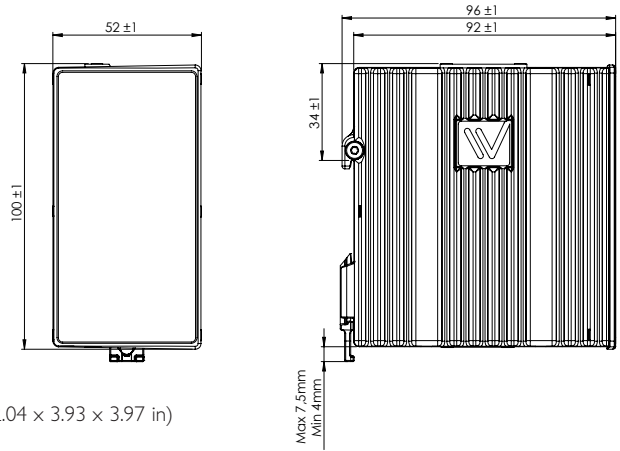

Dimension W x H x D 52 x 100 x 101 mm (2.04 x 3.93 x 3.97 in)
 Weight 0.7 kg
 Degree of protection IP40

Power	
Operating voltage	19 to 60 VDC
Rated current	250 mA (380 mA) @ 24 VDC (with 500 mA USB load) 120 mA (188 mA) @ 48 VDC (with 500 mA USB load)

Interfaces	
Ethernet TX	4 x RJ-45, 10 Mbit/s, 100 Mbit/s,
Ethernet SFP pluggable connections (FX or TX)	SFP (LC connector), 100 Mbit/s or 1000 Mbit/s transceivers supported
2 Serial ports (One configurable for RS-232 or RS-422/485)	1 x RJ-45, RS-232: 50 bit/s – 115.2 kbit/s
	1 x RJ-45, RS-422/485: 50 bit/s – 2 Mbit/s
Digital I/O	1 x 4-position detachable screw terminal
USB	1 x USB 2.0 host interface
Console	1 x 2.5 mm jack, use only Westermo cable 1211-2027

Temperature	
Operating	-40 to +70°C (-40 to +158°F)
Storage & Transport	-50 to +85°C (-58 to +185°F)

Agency approvals and standards compliance	
EMC	EN 61000-6-1, Immunity residential environments
	EN 61000-6-2, Immunity industrial environments
	EN 61000-6-3, Emission residential environments
	EN 61000-6-4, Emission industrial environments
	EN 50121-4, Railway signalling and telecommunications apparatus
	IEC 62236-4, Railway signalling and telecommunications apparatus
Safety	UL/IEC/EN 60950-1, IT equipment
Marine	DNV GL rules for classification – Ships and offshore units