
ImperviTRAN®






ImperviTRAN® is the ultra-reliable industrial control circuit transformer and the most accepted transformer in the industry. Behind its clean design is a toughness that makes it measure up to any requirement placed upon it. ImperviTRAN transformers carry Micron's 20-year warranty.

- Epoxy encapsulated coils
- 20-year warranty, double the industry standard
- Secondary fuse clips where applicable
- Optional primary fusing
- Molded terminal barriers
- 10-32 screw terminals
- Molded-in terminals
- Phil-slot screws


If you have any questions or we can be of any assistance in helping you determine your transformer requirements, please call our Technical Support Group at:

1-800-664-4660





CONNECTION DIAGRAM

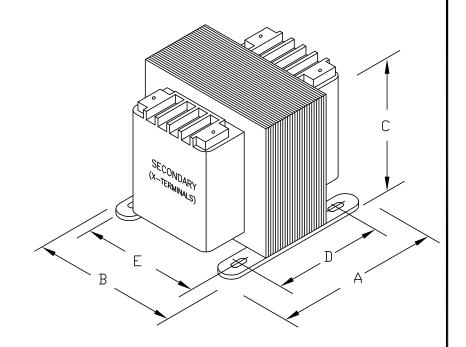

PROVIDED WITH SECONDARY J-2 JUMPERS; PRIMARY JUMPERS AND SECONDARY FUSE CLIPS ARE NOT APPLICABLE.

	APPROX.WT.							
	А	В	С	D	E	MTG. SLOTS	LBS (KG)	
INCHES (MM)	5.25 (133)	4.50 (114)	3.82 (97)	3.75 (95)	3.75 (95)	0.203X0.460 (5.1X11.7)	11.0 (5.0)	



MICRON INDUSTRIES CORPORATION
777 CHURCH RDAD - ELMHURST, IL 60126
Tel. (800) 664-4660, (630) 516-1222 Fax (630) 516-1820
www.MicronTransformers.com

CAT.ND. B300RFD34XJ CONST. ENCAPSULATED									LISTED
CATALOG GROUP		Ι	MODE	MODEL IMPERVITRAN			(1)	LISTED	
	(1)	CERTIFIED							
OUTPUT AMPS	2.72/1.36	PRIMARY V	38	0/4	00/415	TEMP. CLASS	HZ 50/60		
VA	300	SECONDARY V		110)X220	105-C	REVISION G		