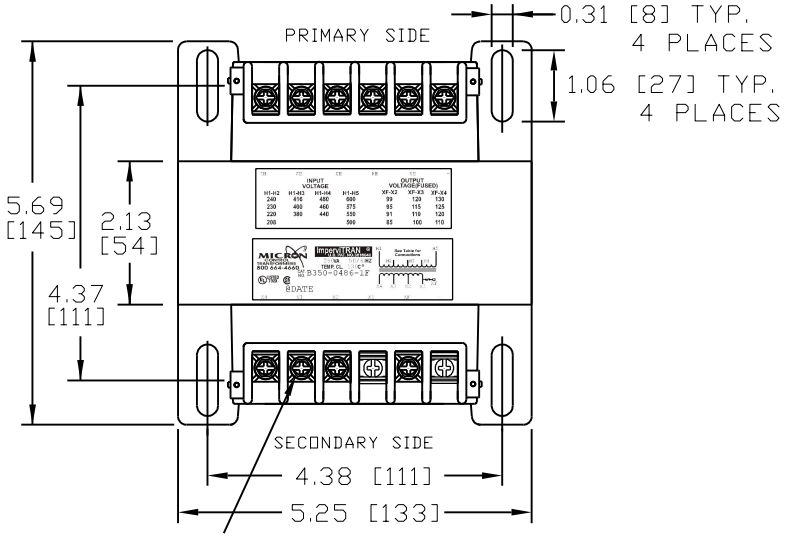

TERMINAL SCREWS ARE COMBINATION
8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER

IND. BOX LABEL

MICRON CONTROL TRANSFORMERS
800 664-4660
www.MicronTransformers.com

350VA
PRIMARY:
240/416/480/600
SECONDARY:
99/120/130
FREQUENCY:
50/60HZ

QTY. 1

MADE IN USA

Cat.
B350-0486-1F

39143

Transformer Specifications	
PRIMARY VOLTAGE(S)	230/400/460/575 (UNIVERSAL)
SECONDARY VOLTAGE(S)	95/115/125
RATED V.A.	350
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CSA
ESTIMATED WEIGHT	15.0 LBS

FOR TEST REQUIREMENTS SEE 415-0144
COIL TEST PAGE

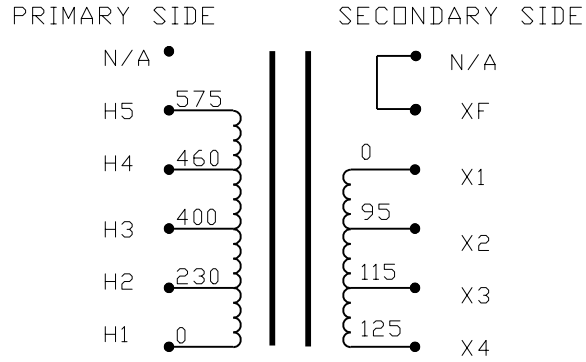

INTERNALLY JUMPERED TO FUSE TERMINAL

CONNECTION DIAGRAM

NOTE:
1. ALL MEASURMENTS IN INCHES (MM)

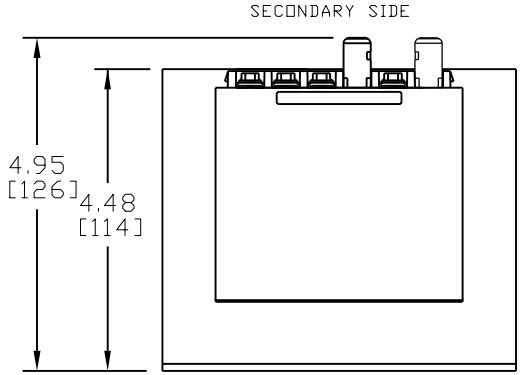

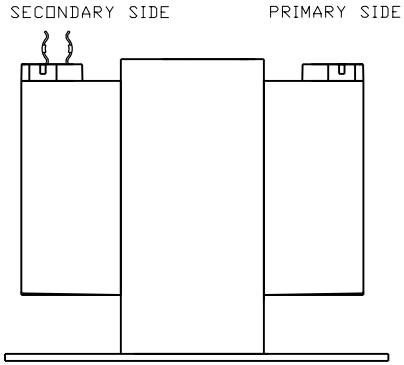

PACKAGED ACCESSORIES	
1	
–	–
–	–

H1	H2	H3	H4	H5	-

INPUT VOLTAGE				OUTPUT VOLTAGE(FUSED)		
H1-H2	H1-H3	H1-H4	H1-H5	XF-X2	XF-X3	XF-X4
240	416	480	600	99	120	130
230	400	460	575	95	115	125
220	380	440	550	91	110	120
208			500	85	100	110

MICRON CONTROL TRANSFORMERS
800 664-4660
www.MicronTransformers.com

ImperviTRAN ® U.S. PAT. NO.3516040

350 VA 50/60 HZ
TEMP CL. 130°C

UL LISTED 702X CAT. NO. **B350-0486-1F**
CSA 39143

SEE TABLE FOR CONNECTIONS



X4 X3 X2 X1 XF -

	DRAWING UPDATED	J.V	11/1/13
G	REDRAWN	J.V	1/21/08
ECL	REVISIONS	BY	DATE

MICRON CONTROL TRANSFORMER
MICRON INDUSTRIES CORPORATION
1211 W.22nd STREET, Suite 200, OAK BROOK, ILL.
Tel. (800)664-4660, (630)516-1222 Fax (630)516-1820
www.MicronPower.com

DATE	DRAWN	CHECKED	APPROVED
1/21/08	J.G.V		
RELEASE DATE	CUSTOMER PART NO.		

MICRON PART NO.
B350-0486-1FG7777A0
B350-0486-1FG7777B0

SIZE	SCALE	
C	NONE	B350-0486-1F