


Transformer Specifications	
PRIMARY VOLTAGE(S)	240 / 417 / 480 / 600
SECONDARY VOLTAGE(S)	99 / 120 / 130
RATED V.A.	50
RATED FREQUENCY	50/60
INSULATION CLASS	105
AGENCY APPROVALS	UL, CSA
ESTIMATED WEIGHT	2.7 LBS

FOR TEST REQUIREMENTS SEE 411-9325F
COIL TEST PAGE

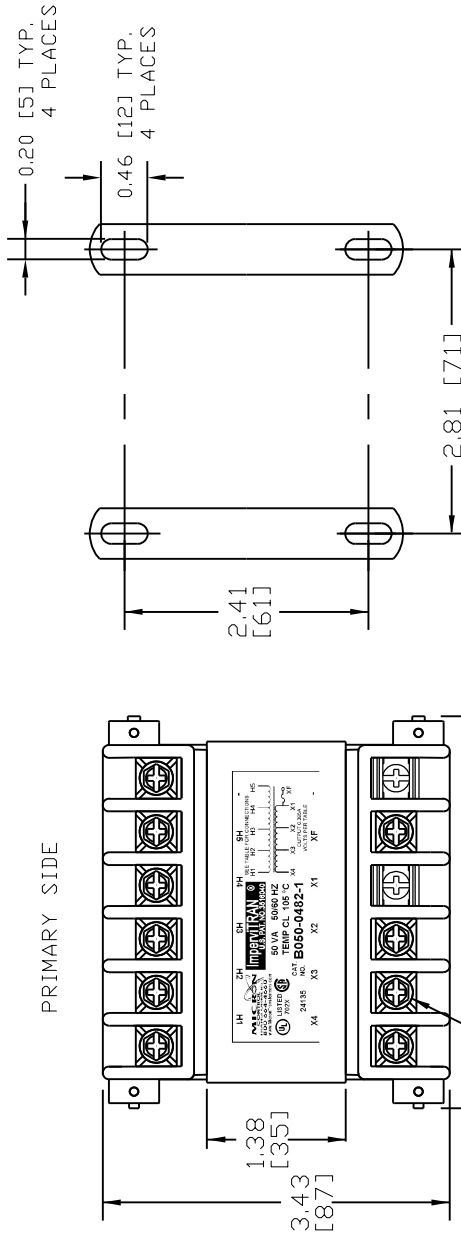

MOUNTING DIMENSIONS IND. BOX LABEL

TERMINAL SCREWS ARE COMBINATION
10-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER

MICRON
TRANSFORMERS
800-664-4660
www.microntransformers.com

50VA
PRIMARY:
240/417/480/600
SECONDARY:
99/120/130
FREQUENCY:
50/60HZ



QTY. 1

UL US

MADE IN USA

Cat. **B050-0482-1**

24135

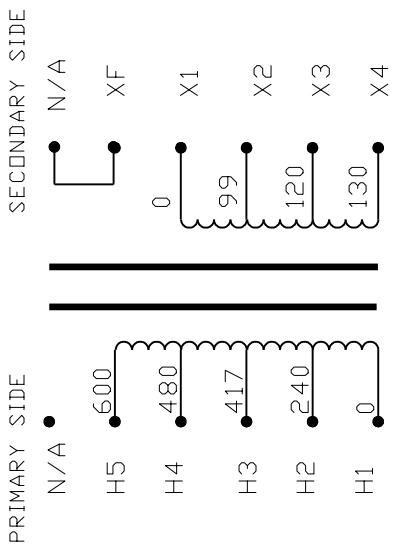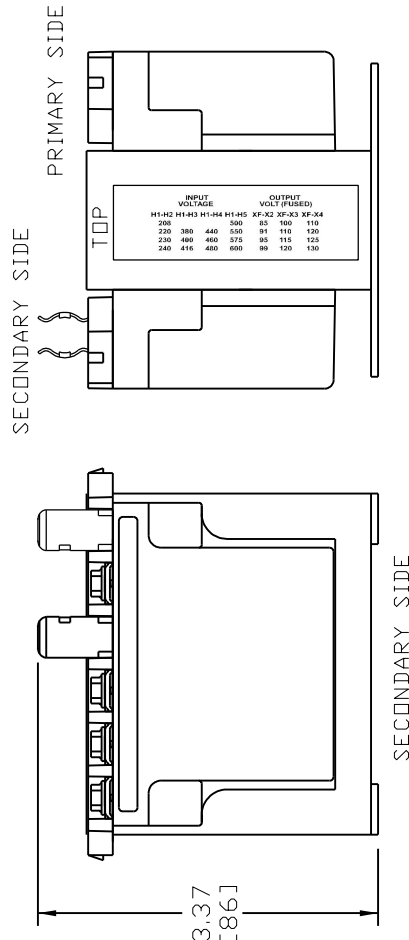

INTERNALLY JUMPERED TO FUSE TERMINAL
CONNECTION DIAGRAM

NOTE:
1. ALL MEASUREMENTS IN INCHES (MM)

INPUT VOLTAGE	H1-H3	H1-H4	H1-H5	XF-X2	XF-X3	XF-X4
H1-H2	208	380	440	500	85	100
H3	220	390	450	510	91	110
H4	230	400	460	520	95	115
H5	240	416	480	530	99	120
OUTPUT (FUSED)						
XF-X2						110
XF-X3						120
XF-X4						125
						130

MICRON
TRANSFORMERS
800-664-4660
www.microntransformers.com

Imperitrans
50 VA 50/60 HZ
TEMP CL 105 °C
CAT. NO. **B050-0482-1**

LISTED 702X

24135

U.S. PAT. NO. 3,516,040

SEE TABLE FOR CONNECTIONS

OUTPUT 0.385A
VOLTS PER TABLE

U.S. PAT. NO. 3,516,040

U.S. PAT. NO. 3,516,040

PACKAGED ACCESSORIES	
1	ONE PAIR J2 JUMPERS
-	-
-	-
-	-
-	-

DATE	5/08/07	DRAWN	RN	CHECKED	APPROVED
RELEASE DATE <td>5/08/07 <td colspan="4">CUSTOMER PART NO.</td> </td>	5/08/07 <td colspan="4">CUSTOMER PART NO.</td>	CUSTOMER PART NO.			
MICRON PART NO.	B050-0482-1J7777A0				
SCALE	C	SIZE	ND	NONE	

B050-0482-1

MICRON
TRANSFORMERS
MICON INDUSTRIES CORPORATION
1211 W. 22nd STREET, SUITE 200, DAK BROOK, ILL.
Tel: (800)664-4660, (630)516-1222 Fax: (630)516-1850
www.microntransformers.com

J	NEW	REVISIONS	BY	DATE
J.V	NEW		RN	5/08/07
J.V	NEW		BY	6/11/13