


Transformer Specifications	
PRIMARY VOLTAGE(S)	690
SECONDARY VOLTAGE(S)	120x240
RATED V.A.	750
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	NO UL OR C.S.A APPROVALS
ESTIMATED WEIGHT	24.9 LBS

TEST REQUIREMENTS	
WINDING	H2-H1 X4-X3 X2-X1
D.C.VOLTS	480 86.32 * 86.32 *
LOAD VOLTS	480 83.48 83.48
F.L. AMPS	0.277 3.125 3.125
HI-POT	4800V 3000V
EXCITING AMPS	0.19AMPS MAX @ 480VDLTS, 50HZ
EXCITING WATTS	26.6 MAX

\* VOLTAGE TOLERANCE IS 85.67 to 86.97 VOLTS


N/A • N/A • N/A



CONNECTION DIAGRAM

NOTE:

1. ALL MEASUREMENTS IN INCHES(MM).

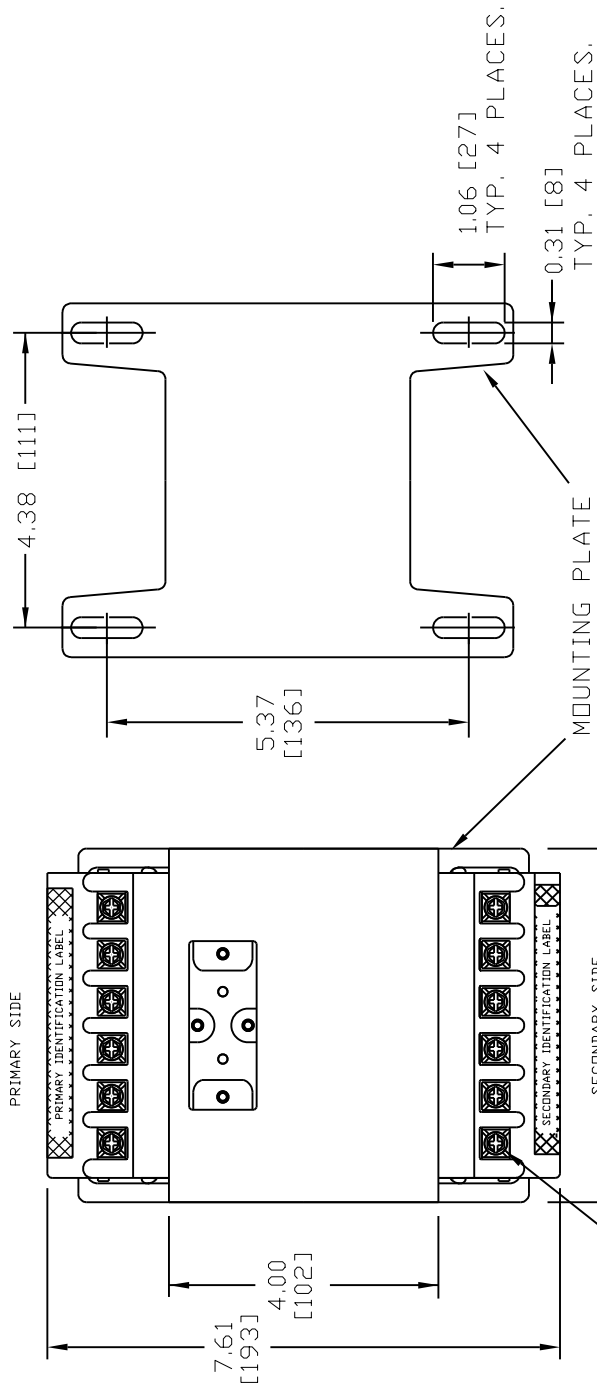

IND. BDX LABEL

FOR CLARITY TOUCHPROOF TERMINAL COVERS SHOWN ON END VIEW ONLY

10-32 PHIL-SLOT-5/16" HEX WITH SEMS WASHER

**MICRON**  
TRANSFORMERS  
www.microntransformers.com


750VA  
PRIMARY:  
690  
SECONDARY:  
120X240  
FREQUENCY:  
50/60HZ

QTY. 1

MADE IN USA

Cat. **B750-0657-5F**  
**SERIES 2**

24115

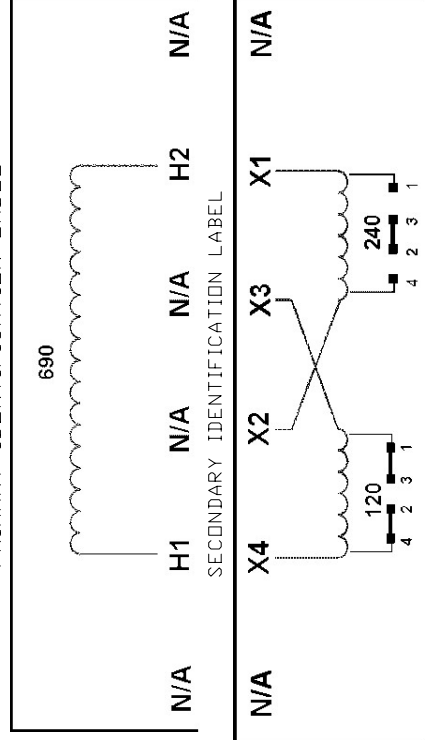

MAIN PRODUCT IDENTIFICATION LABEL

**MICRON**  
TRANSFORMERS  
800 664-4660  
www.microntransformers.com

**Imperviran**  
TRANSFORMERS  
211 V. 22nd STREET, SUITE 200, DAK BROOK, ILL.  
Tel: (800)664-4660, (630)516-3222 Fax: (630)516-1880  
www.microntransformers.com

750VA 50/60HZ  
TEMP CL. 130°C

CAT. NO. **B750-0657-5F**  
**SERIES 2**

24115

PACKAGED ACCESSORIES	
1	ONE PAIR OF JUMPERS
-	-
-	-

DATE	6/13/11	DRAWN	J.G.V	CHECKED	APPROVED
RELEASE DATE		CUSTOMER PART NO.			
MICRON PART NO.					
SCALE					
SIZE					
C	NDNE				

**MICRON**  
TRANSFORMERS  
www.microntransformers.com

MICRON INDUSTRIES CORPORATION  
211 V. 22nd STREET, SUITE 200, DAK BROOK, ILL.  
Tel: (800)664-4660, (630)516-3222 Fax: (630)516-1880  
www.microntransformers.com

B750-0657-5FA7777A2

B750-0657-5F

A	NEW	AN004876	J.V	6/13/11
ECL	REVISIONS	BY	DATE	