

# 716FX2-HV Industrial Ethernet Switch

N-Tron Networking Series



## Managed Industrial Ethernet Switch

The N-TRON® 716FX2-HV Industrial Ethernet Switch offers outstanding performance and ease of use. It is a fully managed switch, ideally suited for connecting Ethernet enabled devices in railway, industrial and security applications.

### PRODUCT FEATURES:

- Fourteen 10/100BaseTX RJ-45 Ports
- Two 100BaseFX Fiber ports, ST or SC style
- -40°C to 70°C Operating temperature
- ESD and Surge Protection Diodes on all Ports
- Auto Sensing 10/100BaseTX, Duplex, and MDIX
- Store-and-forward Technology
- Rugged DIN-Rail Enclosure
- Redundant Power Inputs (40-160VDC)
- Configurable Alarm Contact & Bi-Color Fault Status LED

### Fully Managed Features:

- SNMP v1, v2, v3 and Web Browser Management
- Detailed Ring Map and Fault Location Charting
- N-Ring™ Technology with ~30ms Healing
- N-View™ OPC Monitoring
- N-Link™ Redundant N-Ring Coupling
- Plug-and-play IGMP Support
- 802.1Q tag VLAN and Port VLAN
- 802.1p QoS and Port QoS
- EtherNet/IP™ CIP Messaging
- LLDP (Link Layer Discovery Protocol)
- Port Trunking
- Port Mirroring
- 802.1d, 802.1w, 802.1D RSTP
- DHCP Server, Option 82 relay, Option 61, IP Fallback
- Port Security—MAC Address Based

### Management Features

The 716FX2-HV offers several management functions that can be easily configured using a web browser.

**IGMP Snooping** - Internet Group Management Protocol allows the 716FX2-HV switch to forward and filter multicast traffic intelligently.

**VLAN** - Virtual Local Area Network allows you to segment the switch in order to create two or more separate local area network domains.

**QoS** - Quality of Service provides prioritization of network traffic in order to provide better network service. QoS improves the latency of prioritized Ethernet packets required for ring management, real-time, and other interactive applications.

**Port Trunking** - Trunking (link aggregation) enables multiple physical ports to be linked together and function as one uplink to another N-TRON trunking capable switch configured in the same manner, thereby increasing the bandwidth between switches. This configuration can provide increased bandwidth and redundancy to applications requiring high levels of fault tolerant operation.

**Port Mirroring** - Allows the traffic on one port to be duplicated and sent to a designated mirror port. Port mirroring is used to monitor Ethernet traffic on the designated source port using the assigned mirror port.

**DHCP** - DHCP Server / Client automates the assignment of IP addresses. DHCP Option 82 assures that if a device on a specific port is replaced, the replacement receives the same IP address as the original device.



### Rapid Spanning Tree Protocol

RSTP allows the switch to be configured in a ring or mesh topology, and provides support for redundant path communications with high speed (rapid) healing.

### Remote Monitoring Options

For ease of configuration and monitoring, the 716FX2-HV offers web browser management and N-View OLE for Process Control (OPC) server software. The N-TRON N-View software can be combined with popular HMI software packages to add network traffic monitoring, trending, and alarming to any application using N-TRON switches. In addition SNMP is available for switch link and status monitoring. The alarm contact and status LED can be configured to respond to power failure on power input 1 or input 2, N-Ring Broken, Partial Break High, Partial Break Low, or if multiple Ring managers are detected.

### N-Ring Technology

N-TRON's 716FX2-HV Ring Manager using N-TRON's N-Ring technology offers expanded ring size capacity, detailed fault diagnostics, and a standard healing time of ~30ms. The 716FX2-HV ring manager periodically checks the health of the ring via packets. If the ring manager stops receiving these health check packets, it converts the ring to a linear topology within ~30ms. When all switches in the ring are N-TRON fully managed switches, a detailed ring map and fault location chart will also be provided on the ring manager's web browser and OPC server to identify the health status of the ring. N-link™ allows the linking of two N-Rings. Up to 250 fully managed N-TRON switches can participate in N-Ring topologies.

### Industrial Packaging and Specifications

The 716FX2-HV is designed to operate in industrial environments. It is housed in a rugged steel DIN-Rail enclosure. It has extended industrial specifications and features to meet or exceed the operating parameters of the connected equipment. These include extended temperature ratings, extended shock and vibration specs, redundant power inputs, and high MTBF (greater than 2M hours).

### Ease of Use

The 10/100BaseTX ports are auto sensing and auto configuring. Each copper port is automatically negotiated for maximum speed and performance by default, but can also be hard coded through the user interface. A high speed processor allows wire speed capability on all 100BaseTX ports simultaneously.

## 716FX2-HV Specifications

### Switch Properties

Number of MAC Addresses: 8000  
 Aging Time: Programmable  
 Latency Typical: 2.6  $\mu$ s  
 Switching Method: Store-and-Forward

### Case Dimensions

Height: 2.3" (5.8 cm)  
 Width: 8.3" (21.0 cm)  
 Depth: 4.8" (12.1 cm)  
 Weight (max): 3.3 lbs (1.5 kg)  
 DIN-Rail Mount: 35mm

### Electrical

Redundant Input Voltage: 40-160VDC (Regulated)  
 Input Current (max): 160mA max. @ 124VDC  
 BTU/hr: 67.7@124VDC

### Environmental

Operating Temperature: -40°C to 70°C  
 Storage Temperature: -40°C to 85°C  
 Operating Humidity: 5% to 95%  
 (Non Condensing)  
 Operating Altitude: 0 to 10,000 ft.

### Shock and Vibration (bulkhead mounted)

Shock: 200g @ 10ms  
 Vibration/Seismic: 50g, 5-200Hz, Triaxial

### Reliability

MTBF: >2 Million Hours

### Network Media

10BaseT: >Cat3 Cable  
 100BaseTX: >Cat5 Cable  
 100BaseFX Multimode: 50-62.5/125 $\mu$ m  
 100BaseFXE Singlemode: 7-10/125 $\mu$ m

### Fiber Transceiver Characteristics

Fiber Length	2km*	15km**	40km**	80km**
TX Power Min	-19dBm	-15dBm	-5dBm	-5dBm
RX Sensitivity Max	-31dBm	-31dBm	-34dBm	-34dBm
Wavelength	1310nm	1310nm	1310nm	1550nm

\* Multimode Fiber Optic Cable  
 \*\* Singlemode Fiber Optic Cable

### Connectors

10/100BaseTX: Fourteen (14) RJ-45 Copper Ports  
 100BaseFX: Two (2) SC or ST Fiber Duplex Ports

### Recommended Wiring Clearance

Front: 4" (10.16 cm)  
 Side: 1" (2.54 cm)

### Regulatory Approvals


FCC/CE CFR 47 Part 15, Subpart B, Class A  
 EN55022, ICES-003  
 EN 61000-4-3/4/5/6  
 EN50155 for Railway Applications  
 GS/CE: EN60950-1

### EtherNet/IP™


## 716FX2-HV Industrial Ethernet Switch Ordering Information

716FX2-XX-HV	Fourteen 10/100BaseTX Ports, Two Multimode 100BaseFX Fiber Optic Ports
716FXE2XX-YY-HV	Fourteen 10/100BaseTX Ports, Two Singlemode 100BaseFX Fiber Optic Ports
NTPS-48-2	DIN-Rail Power Supply 48V@2 Amp
700-PM	Panel Mount kit
URMK	Universal Rack Mount Kit

Where: XX = ST or SC  
 E = Singlemode, and Blank Otherwise  
 YY = 15, 40 or 80 for Singlemode, Blank for Multimode

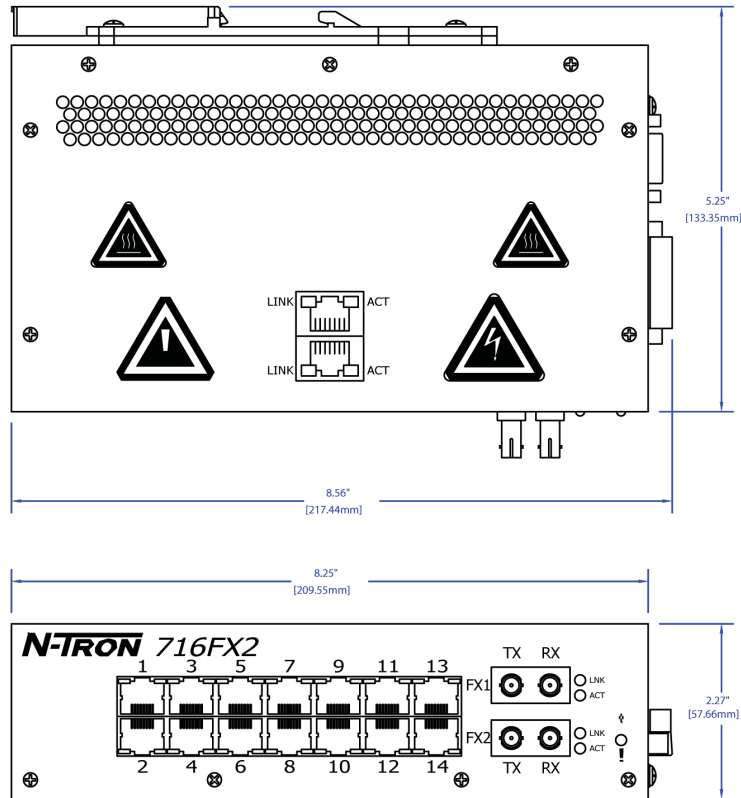

716FX2-HV

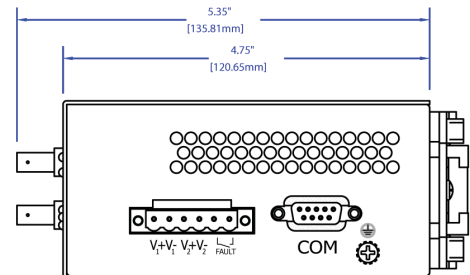

[www.redlion.net](http://www.redlion.net)

Connect. Monitor. Control.

**Americas**  
 sales@redlion.net

**Asia-Pacific**  
 asia@redlion.net

**Europe**  
**Middle East**  
**Africa**  
 europe@redlion.net

+1 (717) 767-6511

As the global experts in communication, monitoring and control for industrial automation and networking, Red Lion has been delivering innovative solutions for over forty years. Our automation, Ethernet and cellular M2M technology enables companies worldwide to gain real-time data visibility that drives productivity. Product brands include Red Lion, N-Tron and Sixnet. With headquarters in York, Pennsylvania, the company has offices across the Americas, Asia-Pacific and Europe. Red Lion is part of Spectris plc, the productivity-enhancing instrumentation and controls company. For more information, please visit [www.redlion.net](http://www.redlion.net).

ADLD0279 080116 © 2016 Red Lion Controls, Inc. All rights reserved. Red Lion, the Red Lion logo, N-Tron and Sixnet are registered trademarks of Red Lion Controls, Inc. All other company and product names are trademarks of their respective owners.